




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G01N 21/35, 21/05	A1	(11) International Publication Number: WO 95/04266 (43) International Publication Date: 9 February 1995 (09.02.95)
<p>(21) International Application Number: PCT/DK94/00297</p> <p>(22) International Filing Date: 1 August 1994 (01.08.94)</p> <p>(30) Priority Data: 0888/93 30 July 1993 (30.07.93) DK</p> <p>(71) Applicant (for all designated States except US): RADIOMETER MEDICAL A/S [DK/DK]; Emdrupvej 72, DK-2400 Copenhagen NV (DK).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): FODGAARD, Henrik [DK/DK]; Nandrupvej 4, DK-2000 Frederiksberg (DK). SINGER, Rolf [DK/DK]; H. Schneeklothsvej 9, DK-2000 Frederiksberg (DK). FABRICIUS, Paul, Erik [DK/DK]; Ole Suhrsgade 8, DK-1354 Copenhagen K (DK).</p> <p>(74) Common Representative: RADIOMETER MEDICAL A/S; Patent Dept., Emdrupvej 72, DK-2400 Copenhagen NV (DK).</p>	<p>(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: **A METHOD AND AN APPARATUS FOR DETERMINING THE CONTENT OF A CONSTITUENT OF BLOOD OF AN INDIVIDUAL**

(57) Abstract

A method and an apparatus for determining the content of a constituent of blood of an individual are disclosed. In the method a whole blood stream is extracted from a blood vessel of said individual, the stream being directed through a path defining a substantially non-varying flow-through area wherein is provided a flow-through measuring cuvette including opposite first and second optical transparent surface parts defining an optical transmission path of the order of 0.5 - 2.0 mm. The whole blood stream flowing through the measuring cuvette is irradiated by irradiating the first optical transparent surface part of the measuring cuvette with multi-wavelength near infrared light. The near infrared absorption spectrum is detected and the content of the constituent is quantified on the basis of the detected near infrared absorption data. The method is particularly suited for measuring constituents of whole blood in an extracorporeal loop, for example in hemodialysis.

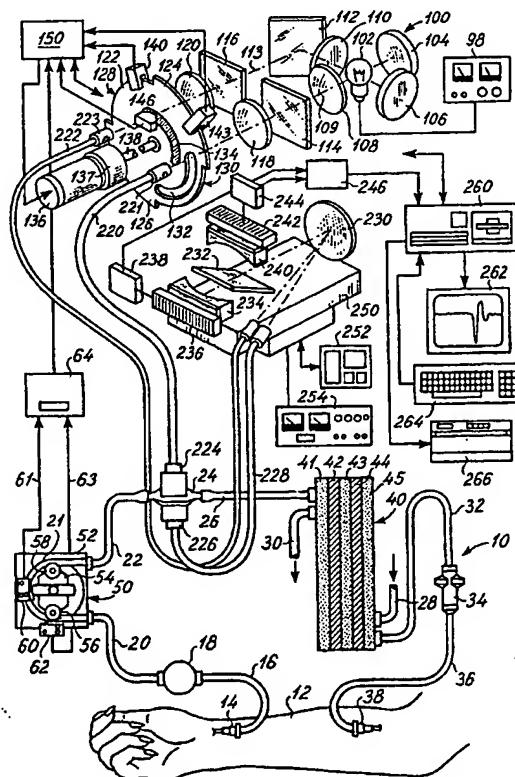

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

A method and an apparatus for determining the content of a constituent of blood of an individual

The present invention relates to novel techniques of determining the content of a constituent of blood of an individual and in particular a novel technique of determining the content of a constituent of blood of a hemodialysis patient.

Individuals suffering from kidney malfunction are treated by dialysis. By the conventional dialysis method, the blood of the patient in question is rinsed by means of a dialysis machine as the blood is contacted with a liquid known as the dialysate through a permeable membrane causing constituents of the blood to permeate through the membrane and be absorbed by substances of the dialysate. Reference is made to "Encyclopedia of Medical Devices and Instrumentation", vol. 316 95-1711 (1988) (Reference 4) in which a detailed discussion of the dialysis technique is presented.

In accordance with the conventional dialysis technique, the patient has his or her blood rinsed for a predetermined period of time which period of time is determined solely on empirical basis. Prior to the dialysis treatment, a blood sample may be collected from the patient which blood sample is analysed and similarly, a blood sample may be collected from the patient after the dialysis treatment has been finished. Through comparison of the two blood samples, the result of or the outcome of the dialysis treatment may be evaluated.

In numerous other situations such as during thorax surgery, a similar situation exists when blood is circulated extracorporeally through a heart-lung machine in order to replace or assist, for a limited time period, the heart or lung function.

An object of the present invention is to provide a novel technique rendering it possible to carry out a real-time or a quasi real-time analysis or determination of the content of a constituent of blood of an individual having his or her blood rinsed in a dialysis machine.

A further object of the present invention is to provide a novel technique rendering it possible to perform a real-time or a quasi real-time analysis or determination of the content of a constituent of blood of a patient when exposed to surgery or similarly having a whole blood stream of the order of 50-1,000 ml/min extracted from a blood vessel.

A feature of the present invention relates to the fact that the novel technique according to the present invention renders it possible to perform a multiconstituent analysis of blood of an individual in real-time or quasi real-time and further to compensate for any fluctuations of the blood flow of the blood stream.

A particular advantage of the present invention relates to the fact that in accordance with the teachings of the present invention, the dialysis treatment of a patient may be monitored in real-time or quasi real-time as a continuous determination or analysis of the constituent of blood such as the content of urea or any other relevant constituent may be determined in real-time or quasi real-time.

The above objects, the above feature and the above advantage together with numerous other objects, features and advantages which will be evident from the below description are in a first aspect of the inven-

tion obtained by a method of determining the content of a constituent of blood of an individual, comprising:

5 extracting a whole blood stream of the order of 50 - 1,000 ml/min from a blood vessel of said individual,

directing said whole blood stream through a flow path defining a substantially non-varying flow-through area and comprising a flow-through measuring cuvette consti-
10 tuting part of said flow path, said flow-through measuring cuvette including opposite first and second optically transparent surface parts defining an optical transmission path of the order of 0.5 - 2.0 mm,

15 irradiating said first optically transparent surface part of said flow-through measuring cuvette with multi-wavelength near infrared light so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said multi-wavelength near infra-
20 red light,

detecting the near infrared absorption spectrum represented by near infrared absorption data of said whole blood stream flowing through said flow-through measuring
25 ing cuvette, and

quantifying said content of said constituent by inputting said near infrared absorption data into a mathematical model representing the relation between the near
30 infrared absorption data and the content of said constituent.

The above objects, the above feature and the above advantage together with numerous other objects, features and advantages are in a second aspect of the
35

invention obtained by a method of determining the content of a constituent of blood of an individual, comprising:

5 extracting a whole blood stream of said individual from a blood vessel of said individual,

directing said whole blood stream through a flow path comprising a flow-through measuring cuvette constituting part of said flow path, said flow-through measuring
10 cuvette including at least one, optically transparent surface part,

propelling said whole blood stream through said flow
15 path by means of a pump causing said whole blood stream to flow through said flow path in a pulsed mode,

monitoring said flow of said whole blood stream through said flow-through measuring cuvette of said flow path,
20 so as to determine periods of substantially constant flow of said whole blood stream through said flow-through measuring cuvette,

irradiating said at least one optically transparent
25 surface part of said flow-through measuring cuvette with electromagnetic radiation of a specific spectral composition, so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said electromagnetic radiation,

30 detecting the electromagnetic radiation absorption spectrum, represented by electromagnetic radiation absorption data, of said whole blood stream flowing through said flow-through measuring cuvette at said
35 periods of substantially constant flow of said whole

blood stream flowing through said flow-through measuring cuvette, and

quantifying said content of said constituent by inputting said electromagnetic radiation absorption data into a mathematical model representing the relation between electromagnetic radiation absorption data and the content of said constituent.

10 The above objects, the above feature and the above advantage together with numerous other objects, features and advantages which will be evident from the below description are in a third aspect of the invention obtained by an apparatus for determining the content of a constituent of blood of an individual, comprising:

means for extracting a whole blood stream from a blood vessel of said individual,

20

a flow path defining a substantially non-varying flow-through area,

means for directing said whole blood stream through said flow path,

25

a flow-through measuring cuvette constituting a part of said flow path, said flow-through measuring cuvette including opposite first and second optically transparent surface parts defining an optical transmission path of the order of 0.5 - 2.0 mm,

30

means for generating and irradiating said first optically transparent surface part of said flow-through measuring cuvette with multi-wavelength near infrared

35

light so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said multi-wavelength near infrared light,

5 detector means for detecting the near infrared absorption spectrum of said whole blood stream flowing through said flow-through measuring cuvette represented by near infrared absorption data, and

10 quantifying means for quantifying said content of said constituent by inputting said near infrared absorption data into a mathematical model representing the relation between near infrared absorption data and the content of said constituent.

15

The above objects, the above feature and the above advantage together with numerous other objects, features and advantages are in a fourth aspect of the invention obtained by an apparatus for determining the
20 content of a constituent of blood of an individual, comprising:

means for extracting a whole blood stream of said individual from a blood vessel of said individual,

25

a flow path,

means for directing said whole blood stream through said flow path,

30

a flow-through measuring cuvette constituting part of said flow path, said flow-through measuring cuvette including at least one optically transparent surface part,

35

means for directing said whole blood stream through said flow path,

5 means for propelling said whole blood stream through said flow path, causing said flow-path to flow through said flow path in a pulsed mode,

10 monitor means for monitoring said flow of said whole blood stream through said flow-through measuring cuvette of said flow path, so as to determine periods of substantially constant flow of said whole blood stream flowing through said flow-through measuring cuvette,

15 means for generating and irradiating said at least one optically transparent surface part of said flow-through measuring cuvette with electromagnetic radiation of a specific spectral composition, so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said electromagnetic radiation of
20 said specific spectral composition,

detector means for detecting the electromagnetic radiation absorption spectrum, represented by electromagnetic radiation absorption data, of said whole blood
25 stream flowing through said flow-through measuring cuvette at said periods of substantially constant flow of said whole blood stream flowing through said flow-through measuring cuvette, and

30 quantifying means for quantifying said content of said constituent by inputting said electromagnetic radiation absorption data into a mathematical model representing the relation between electromagnetic radiation absorption data and the content of said constituent.

The above objects, the above feature and the above advantage together with numerous other objects, features and advantages are in a fifth aspect of the invention obtained by a method of hemodialysis, comprising:

extracting a whole blood stream of the order of 50 - 1,000 ml/min from a blood vessel of an individual,

10 directing said whole blood stream through an extracorporeal flow path to a hemodialyser through a flow path comprising a flow-through measuring cuvette constituting part of said flow path, said flow-through measuring cuvette including opposite first and second optically
15 transparent surface parts defining an optical transmission path of the order of 0.5 - 2.0 mm,

irradiating said first optically transparent surface part of said flow-through measuring cuvette with multi-
20 wavelength near infrared light comprising light of the wavelength range 700 - 1,800 nm such as 1,400 - 1,600 nm so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said multi-wavelength near infrared light,

25 detecting the near infrared absorption spectrum of said whole blood stream flowing through said flow-through measuring cuvette represented by near infrared absorption data,

30 quantifying the content of urea of said whole blood stream by inputting said near infrared absorption data into a mathematical model representing the relation between near infrared absorption data and the content of
35 urea.

- According to a sixth aspect of the present invention, a flow-through measuring cuvette is provided for use in either of the above methods or apparatuses said flow-through measuring cuvette defining a substantially non-varying flow-through area and including opposite, optically transparent surface parts defining a substantially non-varying optical transmission path of the order of 0.5 - 2.0 mm.
- 10 In accordance with the present invention, it has been realized that a whole blood/real-time determination of the content of a constituent of blood of an individual such as a patient suffering from kidney malfunction and being subjected to dialysis treatment may be carried
- 15 out by a multi-wavelength near infrared analysis technique performed as a blood stream of the order of 50 - 1,000 mL/min is directed in its entirety through an optical transmission path of the order of 0.5 - 2.0 mm.
- 20 For handling the blood flow stream in question, the non-varying flow through area is preferably of the order of 5-20 mm², such as 12-17 mm², corresponding to the flow-through area of conventional dialysis tubing.
- 25 It has in accordance with the teachings of the present invention been realized that it is of the outmost importance that the blood of the whole blood stream which is analysed for determining the content of the constituent in question of the blood of the individual in
- 30 question should not be exposed to excessive pressure and/or velocity alterations or variations such as extreme acceleration or deceleration which inevitably result in deterioration or destruction of the blood of the individual in question.

The detection of the near infrared or alternatively the electromagnetic absorption spectrum which constitutes a basis for the quantifying of the content of the constituent in question may be based on transmission or reflection detection techniques in accordance with well known optical detection principles per se.

In a preferred embodiment of the invention the mathematical model allows for determination of several constituents at a time. The relevant constituents are selected from the group of urea, glucose, lactate, total protein, lipids, osmolality and hemoglobins.

According to the presently preferred embodiments of the second and fourth aspect of the present invention, the detection of the electromagnetic radiation absorption spectrum is based on a transmission detection of the electromagnetic radiation transmitted through the blood flow stream flowing through the substantially non-varying optical transmission path as the flow-through measuring cuvette comprises opposite first and second optically transparent surface parts and defines a substantially non-varying optical transmission path, and as the detection of the electromagnetic radiation absorption spectrum is determined by detecting the transmission of the electromagnetic radiation through the whole blood stream flowing through the flow-through measuring cuvette through the optical transmission path thereof.

The cuvette which constitutes the above sixth aspect of the present invention and which also constitutes an element of the methods and apparatuses according to the above first, second, third, fourth and fifth aspects of the present invention preferably constitutes an element

fulfilling the above requirements as to low or substantially low pressure or velocity impact to the blood which is guided through the cuvette. Thus, the flow-through cuvette according to the present invention preferably comprises a central section including said opposite first and second optically transparent surface parts, tubular inlet and outlet sections and first and second transition sections, said first and second transition sections constituting sections connecting said inlet and outlet sections, respectively, to said central section and presenting gradually changing sectional shapes generating to no substantial extent pressure or velocity gradients to said whole blood stream flowing through said flow-through cuvette so as to eliminate to any substantial extent any blood degrading pressure or velocity impact to said blood flow.

According to the presently preferred embodiments of the above aspects of the present invention, the detection of the absorption spectrum being a near infrared absorption spectrum or alternatively another electromagnetic absorption spectrum of the whole blood stream flowing through the flow-through measuring cuvette preferably comprises detecting the spectrum represented by a first set of spectral data of light transmitted through the whole blood stream flowing through the flow-through measuring cuvette and irradiated from the second optically transparent surface part of the flow-through measuring cuvette.

The detection of the absorption spectrum may be based on a previous detection of the spectral composition of the radiation irradiated to the flow-through measuring cuvette. Alternatively and preferably, the detection of the absorption spectrum of the whole blood stream flow-

ing through the flow-through measuring cuvette preferably comprises detecting the spectrum represented by a second set of spectral data of the electromagnetic radiation irradiated to the first optically transparent surface part of the flow-through measuring cuvette thus rendering it possible to compensate for any variation of the radiation caused by for example ageing of the radiation source.

10 The detection of the absorption spectrum preferably further comprises generating the absorption data representing the absorption spectrum in question from the first set of spectral data and from the second set of spectral data, thus compensating for any radiation source changing or ageing effects. The generation of the absorption data from the first and second sets of spectral data is preferably performed by subtracting the first set in logarithmic representation from the second set in logarithmic representation, thus providing the absorption data.

In accordance with optical detection techniques well known in the art, the detection of the absorption spectrum of the whole blood stream flowing through the flow-through measuring cuvette preferably further comprises detecting the spectrum represented by a third set of spectral data of light irradiated from the second optically transparent surface part of the flow-through measuring cuvette at periods of time in which the first optically transparent surface of the flow-through measuring cuvette is not irradiated. The third set of spectral data, thus, represents a reference state, i.e. a state under which no radiation should be detected. The third set of spectral data, thus, constitutes a darkness reference data set which further pro-

vides zero current compensation of the detector or detectors used for detecting the radiation.

5 The darkness compensation and zero current compensation technique preferably further comprises subtracting the third set of spectral data from both the first set of spectral data and from the second set of spectral data, thereby providing corrected first and second sets of spectral data from which the absorption data is provided as previously discussed.

10 The detection of the absorption spectra being near infrared absorption spectra or alternatively electromagnetic absorption spectra is based on spectrophotometrical measuring technique. The spectrophotometrical measuring technique may be performed in accordance with numerous spectrophotometric techniques well known in the art, such as FT (Fourier transformation) spectrophotometric technique, Hadamard transformation spectrophotometric technique, AOTF (Acoustic Optical Tunable Filter) spectrophotometric technique, diode array spectrophotometric technique including reverse optical measuring technique, scanning dispersive spectrophotometric technique or similar spectrophotometric technique.

25 The mathematical model on the basis of which the content of the constituent in question is quantified is preferably established on the basis of a training set of samples having relevant known variations in composition and thus producing relevant absorption spectra. The quantifying of the content of the constituent in question preferably comprises mathematical analysis techniques such as multivariate data analysis technique, e.g. PLS analysis technique (Partial Least

Square), PCR analysis technique (Principal Components Regression), MLR analysis technique (Multiple Linear Regression), artificial neural network analysis technique or similar analysis technique. The mathematical
5 quantifying technique may be performed in accordance with the technique described in US patent No. 4,975,581 to which reference is made and which is hereby incorporated in the present specification by reference.

10 According to the fifth aspect of the present invention, the dialysis treatment may be controlled on the basis of the determination of the content of urea of the whole blood stream as the hemodialysis treatment may be continued until the content of urea of the whole blood
15 stream is decreased below a specific threshold.

The spectrophotometrical detection technique is preferably as will be evident from the below detailed description performed in accordance with the teaching
20 described in US patent No. 4,977,281, to which reference is made and which is hereby incorporated in the present specification by reference. Relevant and interesting detection and measuring techniques are disclosed in US patent No. 5,105,054, US patent No. 4,745,279, US
25 patent No. 4,717,548, US patent No. 4,056,368, EP 0 495 503, EP 0 457 804, EP 0 419 223, EP 0 419 222, EP 0 238 809, DE 2825134. Reference is made to the above US, EP and DE patents and the above US patents are hereby further incorporated in the present description by
30 reference.

Brief Description of the Drawing

The invention will now be further described with reference
35 ence to the drawings, in which

fig. 1 is a schematic view of a whole blood analyzing apparatus illustrating the intentional application of the whole blood analyzing apparatus in connection with monitoring a hemodialytic process,

5

fig. 2 is a perspective view of a beam-splitting chopper section of the whole blood analyzing apparatus shown in fig. 1,

10 fig. 3 is a perspective view of a spectrophotometric section of the whole blood analyzing apparatus shown in fig. 1,

15 fig. 4 is a perspective view of a supply pump of a hemodialysis machine also illustrating a measuring cuvette of the whole blood analyzing apparatus shown in fig. 1 and further a pulse detector,

20 fig. 5 is a perspective and schematic view of a light-transmitting assembly,

fig. 6 is a perspective and schematic view of a light-reflecting assembly,

25 fig. 7 is a block diagrammatic view of the electronic circuitry of the spectrophotometric section shown in fig. 3,

30 fig. 8 is a diagrammatic view of an electronic circuitry section of the dual beam chopper section shown in fig. 2,

35 figs. 9-13 are diagrammatic views of spectra recorded by means of the whole blood analyzing apparatus shown in fig. 1,

fig. 14 is a perspective view of the measuring cuvette of the whole blood analyzing apparatus shown in fig. 1, and

5 fig. 15 is a flow chart representation of the software of the personal computer controlling the over-all operation of the whole blood analyzing apparatus shown in fig. 1.

10 In fig. 1, a prototype embodiment of a whole blood analyzing apparatus is shown implemented in accordance with the teaching of the present invention. The blood analyzing apparatus is shown in the upper part of fig. 1 and comprises a dual beam chopper section 100, shown
15 in the uppermost part of fig. 1 and shown in greater details in fig. 2, a spectrophotometric section, shown in the central part of fig. 1 and shown in greater details in fig. 3, a computer section comprising a personal computer, shown in the central, right-hand
20 part of fig. 1, for carrying out a data processing of data produced by the spectrophotometric section, in accordance with the analyzing technique known as partial least-square methods for spectral analysis, vide e.g. references 1, 2 and 3, and a measuring cuvette 24,
25 shown in the central part of fig. 1 below the spectrophotometric section and also shown in greater details in fig. 14. The cuvette 24 is interfaced between the dual beam chopper section 100 and the spectrophotometric section and is interconnected between a hose pump
30 or peristaltic pump 50 and a dialysis apparatus 10, which hose pump 50 supplies blood from a patient to the dialysis apparatus 10. The hose pump 50 and the dialysis apparatus 10 are shown in the lowermost part of fig. 1. The dialysis apparatus 10 comprises a conventional
35 dialysis machine 40, which communicates with a

blood vessel of a patient or person who needs dialysis treatment. The reference numeral 12 designates a forearm of the patient or person in question.

- 5 From the forearm 12 of the patient or person, blood is extracted through a cannula 14 and supplied through a hose 16 to an arterial pressure monitor 18 and further through a hose 20 to the hose pump 50. The hose pump 50 comprises a housing 52, in which the hose 20 is re-
10 ceived, defining a hose loop 21 communicating with propelling pressure rollers 56 and 58 supported on a pressure-roller support body 54 of the hose pump 50.

- The hose 20 and the hose loop 21 further communicates
15 with a hose 22, establishing connection to the cuvette 24, through which the blood extracted from the forearm 12 is guided in a laminar flow of no substantial pressure or volume flow reduction further to a hose 26, through which the blood is input to the dialysis ma-
20 chine 40 of the dialysis apparatus 10, in which dialysis machine the blood is rinsed as the blood communicates with a dialysis fluid through hemodialysis membranes in accordance with the hemodialysis technique well-known in the art *per se*.

- 25 The dialysis fluid is input to the dialysis machine 40 through an inlet hose 28 and output from the dialysis machine 40 through an outlet hose 30. The blood, which has been subjected to hemodialysis treatment in the
30 dialysis machine 40, is output from the dialysis machine 40 through a further hose 32, which supplies the partly rinsed blood to an air and foam detector 34, serving the purpose of preventing that air bubbles or foam are present in the blood, which is returned

through a hose 36 and a cannula 38 to a blood vessel at the forearm 12 of the patient or person in question.

5 The dialysis fluid and the blood input to the hemodialysis machine 40 are guided through the hemodialysis machine 40 in counterflow. Within the dialysis machine 40, separate compartments are defined, which are designated the reference numerals 41, 42, 43, 44 and 45. The compartments 41, 43 and 45 constitute compartments in
10 which the blood is forced in counterflow in relation to the dialysis fluid, which is forced through the compartments 42 and 44 from the inlet hose 28 to the outlet hose 30.

15 The cuvette 24, which is shown in greater details in fig. 14, constitutes a central or essential component of the whole blood analyzing apparatus. The configuration of the cuvette prevents that the blood is accelerated, decelerated or subjected to pressure or volumetric gradient, which might cause severe damage to the
20 blood cells of the blood. The cuvette is further adapted for NIR infrared spectrophotometric analysis of the blood for analyzing the constituents of the blood and consequently for monitoring the hemodialysis process, which is carried out by means of the dialysis machine
25 40. By the monitoring and analyzing of the hemodialysis operation, a more adequate and efficient hemodialysis operation may be carried out, since the hemodialysis operation may be carried out for a period of time necessary to reduce the contents of specific blood constituents to levels below preset threshold levels. Furthermore, the continuous monitoring and analyzing technique which may be carried out by means of the whole
30 blood analyzing apparatus implemented in accordance with the teaching of the present invention renders it
35

possible to stop the hemodialysis operation as the above threshold levels have been reached, contrary to the conventional hemodialysis operation, in which the hemodialysis operation is carried out for a period of time which is based on a pure estimate based on a blood sample analysis and empirical realizations regarding the relations between hemodialysis time periods and reductions of the contents of specific blood constituents.

10

The cuvette 24 is of a structure in which the optical path is of the order of 1 mm, rendering it possible to carry out a NIR infrared spectrophotometric analysis of the blood which is caused to flow through the cuvette 24 without any substantial pressure gradients being generated by the presence of the cuvette 24 within the blood supply line from the hose pump 50 to the dialysis machine 40.

15

The hose pump 50 is shown in greater details in fig. 4. The roller support body 54 of the hose pump 50 is caused to rotate, as the roller support body 54 is connected to a shaft 53 of a motor 51. As the roller support body 54 is caused to rotate in the clockwise direction in figs. 1 and 2, the blood is caused to be forced from the hose 20, which constitutes a blood inlet hose, through the hose loop 21 and further through the hose 22, which constitutes an outlet tube, towards the cuvette 24.

20

25

The position of the roller body 54 and consequently the rollers 56 and 58, propelling the blood through the hose loop 21, is detected by means of a stem body 59, which constitutes an integral, outwardly protruding part of the roller support body 54, and which engages

30

35

with two switches 60 and 62, serving the purpose of providing electrical signals representing the position of the stem body 59 and consequently the position of the roller support body 54.

5

The switches 60 and 62 generate pulses, which constitute pulse trains representing the actual position of the rollers 54 and 56 and further the rotational motion of the roller support body 54. The switches 60 and 62
10 are arranged so as to generate pulses as the stem body 59 engages with the switch in question, said pulses representing the position of the roller support body 54, in which a pressure wave is generated in the blood supplied from the hose pump as the rollers 56 and 58
15 are disengaged from the hose loop 21.

The pulses generated by the switches 60 and 62 are supplied through electrical signal lines 61 and 63, respectively, to a PLL (phase locked loop) synchronizing
20 circuit block 64, the purpose of which will be evident from the below description.

The dual beam chopper section 100, shown in the uppermost part of fig. 1 and further in fig. 2, comprises a
25 light-generating lamp 102, preferably constituted by a halogen bulb generating visible light, i.e. electromagnetic radiation within the wavelength interval 400 - 700 nm, NIR (NIR infrared radiation), i.e. electromagnetic radiation within the wavelength interval 700-2500
30 nm and IR (infrared radiation), i.e. electromagnetic radiation within the wavelength interval 2500 - 10000 nm. The lamp 102 is supplied from a power supply 98.

The electromagnetic radiation generated by the lamp 102
35 is focussed in two light beams, a first one of which is

generated by means of a mirror 104 and a focussing lens 108, and a second one of which is generated by means of a mirror 106, similar to the mirror 104, a lens 110, similar to the lens 108 and a mirror 112. The first
5 light beam is designated the reference numeral 109 and is directed from the lens 108 through a filter 114, removing electromagnetic radiation from the wavelength range 200- 450 nm, and is directed through a further focussing lens 118. The second light beam is designated
10 the reference numeral 113 and is directed through a filter 116, similar to the filter 114, and is further directed through a further focussing lens 120, similar to the focussing lens 118.

15 The first light beam 109 and the second light beam 113 focussed by means of the focussing lenses 118 and 120, respectively, are chopped by means of a chopper disc 122. The chopper disc 122 serves the purpose of allow-
20 ing transmission of the first and the second light beam to a respective optical fibre and of interrupting the light beams and consequently preventing light from being transmitted to the optical fibre in question. For generating the light-beam chopper effect, the chopper disc 122 is provided with a slit 132, which constitutes
25 a 90° segment of the chopper disc. The chopper disc 122 is caused to rotate, driven by a motor assembly 136, which is provided with a gear assembly 137, serving the purpose of reducing the rotational speed of a motor shaft of the motor assembly 136 to a fairly low rota-
30 tional speed of an output shaft of the gear assembly 137, on which output shaft the chopper disc 122 is mounted. The chopper disc is caused to rotate at a rotational speed of approximately 50-250 rpm in depen-
35 disc 122 rotates, the light beams 109 and 113 are se-

quentially transmitted to a first optical fibre 220 and a second optical fibre 222, respectively. For receiving the light beams 109 and 113, the optical fibres 220 and 222 are provided with optical fibre fittings 221 and 223, respectively.

Apart from the light-transmitting slit 132, the chopper 122 is provided with a light-reflecting surface area 134 and two outwardly protruding rim parts 124 and 126, which are separated by circumferential recesses 128 and 130. The outwardly protruding rim parts 124 and 126 and the circumferential recesses 128 and 130 communicate with two detectors 140 and 143, which serve the purpose of detecting the presence of outwardly protruding rim parts 124 and 126 received within the detector in question. The detectors 140 and 143 are based on the optical principle as will be evident from the below description of the detectors 140 and 143, which are shown in greater details in fig. 8. The detectors 140 and 143 may be based on different detector principles, such as capacitive, inductive or proximity detector principles.

The light-transmitting surface area 134 communicates with a further detector 146, which constitutes a detector, including a light source and a light detector, and which is also in greater details in fig. 8.

The detectors 140, 143 and 146 serve the overall purpose of generating pulses representing the actual position of the chopper disc 122. The pulses generated by the detectors 140, 143 and 146 are input to a detector circuit block 150, which also communicates with the PLL synchronizing circuit block 64, and controls the rotation of the motor assembly 136. The detector circuit block 150 further communicates with the CPU of a per-

sonal computer 260, which CPU performs the data processing of the data generated by the spectrophotometric section of the whole blood analyzing apparatus and performs the overall control of the operation of the apparatus.

The light beam 109 transmitted to the optical fibre fitting 221 and further through the optical fibre 220 is emitted from an optical fibre fitting 224 and transmitted through the cuvette 24 and the blood present within the cuvette 24. The light transmitted through the blood within the cuvette 24 is received by means of an optical fibre fitting 226 and is further transmitted through an optical fibre 228 to the spectrophotometric section shown in the central part of fig. 1 below the above-described dual beam chopper section 100.

The light beam 113 transmitted to the optical fibre fitting 223 and further through the optical fibre 222 is also transmitted to the spectrophotometric section. The optical fibre 222 constitutes a reference light-transmitting optical fibre. The optical fibre 222 is of the same length as the optical fibres 220 and 228 in order to eliminate any influence from differences in optical fibres giving origin to optical fibre length-dependent attenuation. The optical fibres 228 and 222 have their output ends received within an optical fibre connector 229, which is shown in fig. 3, which directs the light received from either of the two optical fibres 228 and 222 to a concave holographic grating 230 of the spectrophotometric section. The spectrophotometric section is preferably constituted by a spectrophotometer as described in US patent no. 4,997,281, to which reference made, and which is herewith incorporated in the present specification by reference.

The light beam emitted from the optical fibre connector 229 and originating from one of the fibres 228 and 222 is reflected from the mirror 230 and transmitted through a beam-splitting mirror 232 and focussed by
5 means of lenses 234 and 240 on first and second optical detectors 236 and 242, respectively. The first and second optical detectors 236 and 242, respectively, are sensitive and responsive to electromagnetic radiation within the wavelength interval 520-1100 nm and 1030-
10 1800 nm, respectively, and are constituted by an array of silicon photodiodes and array germanium photodiodes, respectively. Each of the arrays contains 76 diodes together providing a 152 incremental representation of the wavelength interval 520-1800 nm.

15 The first optical detector 236 is connected to an optical detector circuit block 238, including a multiplexing circuit serving the purpose of sequentially presenting the output signals generated by the photodiodes of the array of photodiodes of the optical detector 236
20 to an input of an A/D converter 246. Similarly, the second optical detector 242 is connected to an optical detector circuit block 244, including a multiplexing circuit, also serving the purpose of sequentially presenting the output signals generated by the photodiodes
25 of the array of photodiodes of the optical detector 242 to an input of the A/D converter 246.

The A/D converter 246 is through its output connected
30 to an input of the CPU of the personal computer 260. The A/D converter 246 is also supplied with measuring signals supplied through multiplexing input circuits and representing additional measuring parameters, such as the temperature of the spectrophotometric section
35 block and generated by means of a temperature detector.

The components of the spectrophotometric section block are supported on a support block 250, which constitutes a base plate of a thermally insulating encasing or housing, not shown in Fig. 1, which is thermostatically controlled by means of a thermostatic controller 252 to a temperature of 16°C. The electronic circuitry of the spectrophotometric section block is powered from a power supply 254.

10 In fig. 4, the hose pump 52 and the pivot 24 together with the optical fibres 220 and 228 connected to the cuvette 24 through the optical fibre fittings 224 and 226, respectively, are shown together with a pulse detector 86, which is mounted on the hose 26 or alternatively mounted on the hose 22 adjacent the cuvette 24. The pulse detector 86 is provided with electrical wires 82 and 84 for establishing electrically conductive connection to the PLL synchronizing circuit block 64, shown in fig. 1, and for supplying electrical signals thereto, representing the blood flow through the detector and further the variation of the blood flow through the hose 26, on which the pulse detector 86 is mounted, and consequently through the cuvette 24, caused by the pressure fluctuations generated by the hose pump 52, as discussed above. The pulse detector 86 may be based on inductive or capacitive detector principles or alternatively based on optical detection techniques, as the pulse detector 86 may comprise light-generating means and light-detecting means monitoring the blood flow through the pulse detector based on optical transmission principles or optical reflection principles or may further alternatively constitute a fibre optic connector, to which two optical fibres are connected, said optical fibres substituting the electrical wires 82 and 84.

In fig. 5 an alternative light transmission technique is shown, as the cuvette 24 is omitted. The hoses 22 and 26 constitute an integral hose which is clamped between the optical fibre connectors 224 and 226, defining a shallow hose segment 90 of a configuration similar to that of the cuvette 24, as the optical fibre connectors 224 and 226 are fixated by means of a clamping device 225 so as to define a specific spacing between the output end of the optical fibre fitting 224 and the input end of the optical fibre fitting 226.

Fig. 6 illustrates a further, alternative, optical detector technique, according to which the light transmission technique implemented by means of the optical fibres 222 and 228 is substituted by an optical detector implemented in accordance with the optical reflection technique. In fig. 6, an optical detector 92 is shown, which is mounted on the hose 26 and comprises an input optical fibre 94 and an output optical fibre 96, which optical fibres detect electromagnetic radiation radiated from the output end of the optical fibre 94 and reflected from the blood flown through the optical detector 92. The optical detector 92 may constitute a component substituting the pulse detector 86, shown in fig. 4, or alternatively constitute a component replacing the optical transmission detector comprising the optical fibres 222 and 228, the optical fibre connectors 224 and 226, respectively, and further the cuvette 24.

30

In an alternative embodiment of the optical detector 92, the optical detector communicates with a cuvette, such as the cuvette 24, shown in figs. 1 and 4 and further in fig. 14, or an alternative cuvette structure adapted to allow the blood to flow through the cuvette

35

without any substantial pressure or volumetric variations.

In fig. 2, the dual beam chopper section 100 is shown in greater details further illustrating a supporting plate 101, on which an optical housing 103 is mounted. The optical housing 103 includes the lamp 102, the mirrors 104 and 106 and the lenses 108 and 110. Fig. 2 further illustrates two filter supports 115 and 117, which support the filters 114 and 116, described above. Fig. 2 further illustrates the journalling of the chopper disc 122, which is sandwiched between two brackets 121 and 123, which also serve the purpose of supporting the optical fibre fittings 221 and 223 and further the gear assembly 137, the output shaft 138 of which is connected to the chopper disc 122, as the chopper disc 122 is mounted on the output shaft 138. In fig. 2, a printed circuit board 151 is shown, which constitutes the printed circuit board of the detector circuit block 150, shown in fig. 1 and shown in greater details in fig. 8.

In fig. 3, the spectrophotometric section block is shown. Apart from the optical fibres 222 and 228 and the optical fibre connector 229, the concave holographic grating 230 and the beam-splitting mirror 232 are shown. The reference numeral 251 designates a bracket which is rigidly connected to the support plate 250 of the spectrophotometer, and the reference numerals 239 and 245 designate printed circuit boards containing the electronic circuitry of the first and second optical detector circuit blocks 238 and 244, respectively, shown in fig. 1. The reference numeral 247 designates a multicore cable which interconnects the printed circuit boards 239 and 245 and is further connected to a multi-

pin socket 248 for receiving a mating multipin plug for establishing electrically conductive connection with the CPU of the personal computer 260.

5 Fig. 7 is a block diagram of the electronic circuitry of the spectrophotometric section shown in the central part of fig. 1, and further shown in fig. 3. In fig. 7, the first optical detector 236 is connected to the first optical detector circuit block 238, which is
10 shown in dotted line in the uppermost part of fig. 2 and which comprises two multichannel preamplifier blocks 268 and 270, the inputs of which are connected to respective diodes of the diode array of the first optical detector 236. The outputs of the multichannel
15 preamplifier blocks 268 and 270 are connected to respective inputs of a multiplexer block 272, the outputs of which are connected via an optional programmable gain and offset block 274 to the A/D converter block 246, shown in Fig. 1. The control input of block 274 is
20 connected to a control output of a digital control block 276. A control input of the digital control block 276 is connected to the CPU 260 of the personal computer controlling the overall operation of the whole blood analyzing apparatus. The A/D converter 246 is also
25 controlled by the digital control block 276 through a separate control input, which is connected to a control output of the digital control block 276.

In the lowermost part of fig. 7, the second optical detector 242 is shown, which is connected to the second
30 optical detector block 244. The second optical detector block 244 is of a topographical configuration similar to that of the first optical detector block 238 and comprises two multichannel preamplifier blocks 278 and
35 280 corresponding to the multichannel preamplifier

blocks 268 and 270 described above, which are further connected to a multiplexer block 282 similar to the multiplexer block 272 of the first optical detector circuit block 238. The multiplexer block 282 is via an optional programmable gain and offset block 284 similar to the block 274 connected to the A/D converter block 246, shown in Fig. 1. The optional programmable gain and offset block 284 of the second optical detector circuit block 244 is controlled by the digital control block 276, which is shared by the two optical detector circuit blocks 238 and 244. The multiplexer block 282 is like the multiplexer block 272 controlled by the digital control block 276.

The electronic circuitry shown in fig. 7 is further described in US patent no. 4 997 281, to which reference is made, and which is hereby incorporated in the present specification by reference.

Fig. 8 is a block diagram of the detector circuit block 150, the PLL synchronizing circuit block 64 and further the detectors 140, 143 and 146. In the upper left-hand part of fig. 8, the detectors 140 and 143 are shown, each comprising a light-emitting diode 141 and 144, respectively, and a phototransistor 142, 145, respectively. The emitter of the phototransistors 142 and 145 are connected through series configurations of a light-emitting diode 152 and 154, respectively, and a resistor 156 and 158, respectively, to a positive supply rail of the detector circuit block 150, and the emitters of the phototransistors which constitute NPN transistors are grounded. The light-emitting diodes 141 and 144 have their anodes connected through a common series resistor 160 to the positive supply rail and have their cathodes grounded.

As one of the phototransistors 142 and 145 receives light emitted from the light-emitting diode 141 and 144, respectively, the phototransistor in question starts conducting and causes the potential of the collector of the phototransistor in question to be lowered from the voltage of the positive supply rail, causing a shift of a respective detector input pin of an integrated circuit control block 168. The resistors 156 and 158 constitute pull-up resistors, which cause the inputs of the integrated circuit control block 158 connected to the collectors of the phototransistors 162 and 168 to be pulled up to the voltage of the positive supply rail, to which the resistors 156 and 158 are connected through the LEDs 152 and 154, respectively, provided the phototransistors 142 and 145 are not in their conductive states. The integrated circuit control block 168 is provided with addition control inputs, which are connected through pull-down resistors 182, 184, 186 and 188 to ground and further through switches 181, 183, 185 and 187, respectively, to the positive supply rail of the detector circuit block 150. The switches 181 and 183 are provided for inverting the signals output from the integrated circuit block 168 to the PLL synchronizing circuit block 64 to be described in greater details below. The switches 185 and 187 are provided for debugging purposes.

The detector 146 is, like the detectors 140 and 143, provided with a light-emitting diode 147 and a phototransistor 148. The anode of the light-emitting diode 147 is connected to the positive supply rail of the detector circuit block 150 through a resistor 162, and the junction of the cathode of the light-emitting diode 147 and the emitter of the phototransistor 148, which of an NPN configuration, are connected to the ground.

The collector of the phototransistor 148 is connected through a pull-up resistor 164 to the positive supply rail and further connected to the non-inverting input of an operational amplifier 170. The inverting input of the operational amplifier 170 is connected to an offset compensation potentiometer 166, which is interconnected between the positive supply rail of the detector circuit block 150 and the ground. The output of the operational amplifier 170 is connected through a potentiometer 172 to the ground, and the wiper of the potentiometer 172 is connected to the base of an NPN transistor 180, the emitter of which is grounded, and the collector of which is connected to the positive supply rail through the series configuration of a light-emitting diode 174 and a resistor 176. The wiper of the potentiometer 172 is also connected to a control input pin of the integrated circuit control block 168.

In the lower part of fig. 8, the PLL synchronizing circuit block 64 is shown, which is connected to the switches 60 and 62, mounted on the stem body 54 of the hose pump 50, serving the purpose of detecting the rotational operation of the roller support body 54 of the hose pump 50, as described above. The switches 60 and 62 are switchable between inoperative states, in which the switches connect the positive supply rail of the overall electronic circuitry of the whole blood analyzing apparatus to control inputs of an integrated circuit 66, constituting a flip-flop circuit, and operative states, in which the switches connect the control inputs of the integrated circuit 66 to the ground. The output of the integrated circuit 66 is connected to a signal input of a PLL synchronizing chip 68, which further has its compensation input connected to a control output of the integrated circuit control block 168

of the detector circuit block 150. A SNP output terminal of the integrated circuit 68 is connected through a series configuration of a resistor 70 and a diode 22 to the ground. An output terminal of the integrated circuit 68 is connected to an VCO input of the integrated circuit 68 through a resistor 74 and further grounded through a capacitor 76. The VCO input of the integrated circuit 68 is further connected to a non-inverting input of an operational amplifier 78, which is operated in a unity-gain non-inverting mode, as the output of the operational amplifier 78 is short-circuited to the inverting input of the operational amplifier 78. The output of the operational amplifier 78 is connected through a variable resistor 80 to junction at the non-inverting input of an operational amplifier 196 of the detector circuit block 150, the non-inverting input of which is further connected through variable resistors 190, 191 and 192 to output control terminals of the integrated circuit control block 168 and grounded through a resistor 193.

The output of the operational amplifier 196 is connected through a resistor 198 to the base of an NPN Darlington power transistor 208, the collector of which is connected to the positive supply rail of the detector circuit block 150, and the emitter of which is connected through a series resistor 206 to a pin of a relay contact 215, which in its operative state supplies current through the NPN Darlington power transistor 208 and the resistor 206 to the motor 136. The collector and the emitter of the NPN Darlington power transistor 208 are short-circuited through a capacitor 210 constituting a noise-suppression capacitor. The emitter of the NPN Darlington power transistor 208 is further connected through a resistor 204 to the base of a NPN

transistor 200, the collector of which is connected to the base of the NPN Darlington power transistor 208, and the emitter of which is connected to the relay contact of the relay 215. The transistor 200 constitutes a feedback current-limiting transistor, the emitter of which is connected through a resistor 202 to the inverting input of the operational amplifier 196, the inverting input of which is further grounded through a resistor 194.

10

The relay contact 215 is activated by means of a relay coil 214, provided the integrated circuit detector block 168 shifts a separate motor output low, which output is connected through a resistor 195 to the base of a NPN relay turn-on resistor 212, the emitter of which is grounded, and the collector of which is connected to one terminal of the relay coil 214, the other terminal of which is connected to the positive supply rail of the detector circuit block 150.

20

The terminals of the relay coil 214 are further short-circuited through a noise-suppressing capacitor 216. Provided that the relay coil 214 is not energized, the relay contact 215 short-circuits the motor 136. A surge-suppression diode 218 is further provided, short-circuiting the terminals of the motor 136.

25

Figs. 9, 10, 11, 12 and 13 are diagrams illustrating print-outs produced from the measurement of sample fluids which are analyzed by means of the whole blood analyzing apparatus according to the present invention.

30

In figs. 9, 10, 11, 12 and 13 the abscissa axis represents the pixel number 0-151 corresponding to the near infrared wavelength interval 520-1800 nm represented by

35

a total of 152 pixels i.e. providing a 152 incremental wavelength interval representation of the above 520-1800 nm wavelength interval.

- 5 In fig. 9, the number of counts generated by a specific light detecting element of a specific pixel corresponding to a specific wavelength interval are represented along the ordinate axis. In fig. 9, three curves A, B and C are shown representing a sample signal, a reference signal and a dark signal, respectively.
- 10

- In fig. 10, three curves D, E and F are shown representing the absorbance of glucose, lactate, and urea, respectively, indicated along the ordinate axis. For clarity curve D and E are shown offset from curve F.
- 15 From fig. 10, it is evident that the peak of pixel no. 120 corresponding to the wavelength of 1490 nm of urea is distinguishable from the spectra of e.g. glucose and lactate. For illustrating the possibility of determining urea from e.g. lactate and glucose, the spectra D, E and F are represented in one and the same diagram shown in fig. 11.
- 20

- In fig. 12, two curves G and H are shown representing the absorbance of oxyhemoglobin and deoxyhemoglobin, respectively. In fig. 12, four references I, J, K, and L are further shown. The references I and J represent peaks characteristics of deoxyhemoglobin and the reference K represents a peak characteristic of oxyhemoglobin. Oxyhemoglobin and deoxyhemoglobin represent 100 and 0 percentage saturated blood, respectively. The reference L indicates a peak characteristic of water. It is to be realized that the peak L is partly overlapping the peaks of the curves D, E, and F shown in figs. 10 and 11.
- 25
- 30
- 35

In fig. 13, a curve M is shown representing the absorbance of a blood sample. The curve M exhibits the characteristic peak K and L of oxyhemoglobin also shown in fig. 12.

5

In Fig. 14, the cuvette 24 is shown in greater details. The cuvette 24 is of a symmetrical structure and comprises a central section 286 defining opposite optically transparent plane surfaces together defining a constant flow-through area and an optical transmission path through the blood flowing through the cuvette of the order of 0.5-2.0 mm, preferably 1.0 mm. The cuvette 24 is at opposite ends provided with tubular sections 288 and 290 for establishing connection to external hoses supplying blood to and from the cuvette. Between the tubular sections 288 and 290 and the central section 286 of the cuvette 24, transition sections 289 and 291, respectively, are provided for preventing that the blood flowing from one of the tubular sections 288 and 290 to the central section 286 and vice versa is exposed to excessive pressure or velocity gradients which might deteriorate the blood.

In fig. 15, a flow chart of the software of the personal computer is shown, designated the reference numeral 300 in its entirety. The software centrally comprises a "Main menu block" 302 connected to a "Start block" 304, a "View data block" 312 and an "Exit data block" 316. The "Main menu block" 302 is further connected to an "Acquisition menu block" 314 which is further connected to three blocks, a "Set up parameter block" 306, a "Save data block" 310 and a "Measure data block" 308. The "Measure data block" 308 internally comprises a plurality of program steps designated the reference numerals 320-331. The first step is constituted by a

"Measure data block" 320, a second step is constituted by a "Wait for dark chopper position block" 321 and a third step is constituted by a "Collect dark scan block" 322. A fifth step is constituted by a "Wait for reference chopper position block" 323, a fourth step is constituted by a "Collect reference scan block" 324, a sixth step is constituted by a "Wait for dark chopper position block" 325, a seventh step is constituted by a "Collect dark scan block" 325, an eighth step is constituted by a "Wait for sample chopper position block" 327, a ninth step is constituted by a "Collect sample scan block" 328, a tenth step is constituted by a "Wait for dark chopper position block" 329, an eleventh step is constituted by a "Collect dark scan block" 331, and a twelfth step is constituted by a "Decision block done? block" 330. Provided the preset number of scans has not been reached, the program reverts to the fourth measuring step of the "Wait for reference chopper position block" 323. Provided the preset number of scans has been reached, the program proceeds to the data "Aquisition menu block" 314.

The data aquisition takes place as follows:

25 The apparatus provides two channels, each supporting a photodiode detector array constututed by the first and second optical detectors 236 and 242, respectively, of 76 pixels and 4 additional auxiliary inputs. The silicon and germanium diode arrays cover the visible and near infrared regions of the spectrum from 520 to 1800 nanometers.

For maximum noise suppression, data is collected in time intervals based on multiples of power line cycles.
35 Pixels are scanned as to permit the summing of up to

eight values of each pixel evenly spaced over the line cycle to enable the contributions of the line frequency to cancel. The user is given complete control over the scan sequence via the Scan-Order table editor.

5

Acquired data is currently displayed from memory as tables of numerical values. This information may be written to disk for example in the form of ASCII files which may be read into various spread-sheet or spectral

10 interpretation software packages.

References:

- Ref. 1: Haaland, D.M.; Thomas, E.V.
Partial least-square methods for spectral
analyses. 1. relation to other quantitative
calibration methods and the extraction of
quantitative information
Anal Chem 60:1193-1202 (1988)
- 5
- 10 Ref. 2: Haaland, D.M.; Thomas, E.V.
Partial least-square methods for spectral
analyses. 2. Application to simulated and
glass spectral data
Anal Chem 60:1202-1208 (1988)
- 15
- Ref. 3: Geladi, P.; Kowalski, B.R.
Partial least-square: a tutorial
Analytical Chimica Acta 185:1-17 (1986)
- 20 Ref. 4: Webster, John G.
Encyclopedia of Medical Devices and Instru-
mentation, Vol. 3: 1695-1711 (1988)

List of Reference Numerals:

	10	Dialysis apparatus
	12	Forearm of patient
5	14	Cannula
	16	Hose
	18	Arterial pressure monitor
	20	Hose
	21	Hose loop
10	22	Hose
	24	Cuvette
	26	Hose
	28	Dialysis fluid inlet hose
	30	Dialysis fluid outlet hose
15	32	Hose
	34	Air and foam detector
	36	Hose
	38	Cannula
	40	Dialysis machine
20	41	Dialysis fluid compartment
	42	Blood through-flow compartment
	43	Dialysis fluid compartment
	44	Blood through-flow compartment
	45	Dialysis fluid compartment
25	50	Hose pump
	51	Motor
	52	Housing
	53	Shaft
	54	Roller support body
30	56	Roller
	58	Roller
	59	Stem body
	60	Switch
	61	Electrical signal line
35	62	Switch

- 63 Electrical signal line
- 64 PLL synchronizing circuit block
- 66 Integrated circuit
- 68 Integrated circuit
- 5 70 Resistor
- 72 Diode
- 74 Resistor
- 76 Diode
- 78 Operational amplifier
- 10 80 Variable resistor
- 82 Optical fibre or wire
- 84 Optical fibre or wire
- 86 Pulse detector
- 88 Clamping device
- 15 90 Hose section
- 92 Optical detector
- 94 Optical fibre
- 96 Optical fibre
- 98 Power supply
- 20 100 Beam-splitting chopper section
- 101 Supporting plate of beam-splitting chopper section
- 102 Lamp
- 103 Optical housing
- 104 Mirror
- 25 106 Mirror
- 108 Lens
- 109 First light beam
- 110 Lens
- 112 Mirror
- 30 113 Second light beam
- 114 Filter
- 115 Filter support
- 116 Filter
- 117 Filter support
- 35 118 Lens

- 120 Lens
- 121 Bracket
- 122 Chopper disc
- 123 Bracket
- 5 124 Protruding rim part
- 126 Protruding rim part
- 128 Circumferential recess
- 130 Circumferential recess
- 132 Slit
- 10 134 Reflecting surface area
- 136 Motor assembly
- 137 Gear assembly
- 138 Output shaft
- 140 Detector
- 15 141 LED
- 142 Photo-transistor
- 143 Detector
- 144 LED
- 145 Photo-transistor
- 20 146 Detector
- 147 LED
- 148 Photo-transistor
- 150 Detector circuit block
- 151 PCB of detector circuit block
- 25 152 LED
- 154 LED
- 156 Resistor
- 158 Resistor
- 160 Resistor
- 30 162 Resistor
- 164 Resistor
- 166 Variable resistor
- 168 Integrated circuit
- 170 Operational amplifier
- 35 172 Variable resistor

	174	LED
	176	Resistor
	180	NPN transistor
	181	Switch
5	182	Resistor
	183	Switch
	184	Resistor
	185	Switch
	186	Resistor
10	187	Switch
	188	Resistor
	190	Variable resistor
	191	Variable resistor
	192	Variable resistor
15	193	Resistor
	194	Resistor
	195	Resistor
	196	Operational amplifier
	198	Resistor
20	200	NPN transistor
	202	Resistor
	204	Resistor
	206	Resistor
	208	NPN transistor
25	210	Capacitor
	212	NPN transistor
	214	Coil
	215	Switch
	216	Capacitor
30	218	Diode
	220	Optical fibre
	221	Optical fibre fitting
	222	Optical fibre
	223	Optical fibre fitting
35	224	Fitting

- 225 Clamping device
- 226 Fitting
- 228 Optical fibre
- 229 Optical fibre connector
- 5 230 Convex holographic grating
- 232 Beam-splitting mirror
- 234 Lens
- 236 First optical detector
- 238 First optical detector circuit block
- 10 239 PCB of first optical detector circuit block
- 240 Lens
- 242 Second optical detector
- 244 Second optical detector circuit block
- 245 PCB of second optical detector circuit block
- 15 246 A/D converter
- 247 Multicore cable
- 248 Multipin socket
- 250 Thermostatically controlled support block
- 251 Bracket
- 20 252 Thermostatical controller
- 254 Power supply
- 260 CPU of PC
- 262 Display of CRT monitor
- 264 Keyboard
- 25 266 Printer
- 268 Pre-amp
- 270 Pre-amp
- 272 Multiplexer
- 274 Programmable gain and offset block
- 30 276 Digital control block
- 278 Pre-amp
- 280 Pre-amp
- 282 Multiplexer
- 284 Programmable gain and offset block
- 35 286 Central section of cuvette 24

288 Tubular section
290 Tubular section
289 Transition section
291 Transition section
5 300 Software flow chart
302 Main menu block
304 Start block
306 Set up parameter block
308 Measure data block
10 310 Safe data block
312 View data block
314 Acquisition menu block
316 Exit block
320 Measure data block
15 321 Wait for dark chopper position block
322 Collect dark scan block
323 Wait for reference chopper position block
324 Collect reference scan block
325 Wait for dark chopper position block
20 326 Collect dark scan block
327 Wait for sample chopper position block
328 Collect sample scan block
329 Wait for dark chopper position block
330 Decision or Done? block
25 331 Collect dark scan block

PATENT CLAIMS

1. A method of determining the content of a constituent of blood of an individual, comprising:
 - 5 extracting a whole blood stream of the order of 50-1,000 ml/min from a blood vessel of said individual, directing said whole blood stream through a flow path defining a substantially non-varying flow-through area and comprising a flow-through measuring cuvette
 - 10 constituting part of said flow path, said flow-through measuring cuvette including opposite first and second optically transparent surface parts defining an optical transmission path of the order of 0.5 - 2.0 mm, irradiating said first optically transparent sur-
 - 15 face part of said flow-through measuring cuvette with multi-wavelength near infrared light so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said multi-wavelength near infrared light,
 - 20 detecting the near infrared absorption spectrum represented by near infrared absorption data of said whole blood stream flowing through said flow-through measuring cuvette, and quantifying said content of said constituent by
 - 25 inputting said near infrared absorption data into a mathematical model representing the relation between the near infrared absorption data and the content of said constituent.
- 30 2. The method according to Claim 1, said non-varying flow-through area being of the order of 5-20 mm², preferably 12-17 mm².
3. The method according to any of the Claims 1 or 2,
- 35 said flow-through measuring cuvette comprising a cen-

tral section including said opposite first and second optically transparent surface parts, tubular inlet and outlet sections and first and second transition sections, said first and second transition sections constituting sections connecting said inlet and outlet sections, respectively, to said central section and presenting gradually changing sectional shapes generating to no substantial extent pressure or velocity gradients to said whole blood stream flowing through said flow-through cuvette so as to eliminate to any substantial extent any blood degrading pressure or velocity impact to said blood flow.

4. The method according to any of the Claims 1-3, said mathematical model being established on the basis of a training set of samples having relevant known variations in composition and thus producing relevant absorption spectra.

5. The method according to Claim 4, said quantifying of said content of said constituent further comprising mathematical analysis technique such as multivariate data analysis technique, e.g. PLS analysis technique (Partial Least Square), PCR analysis technique (Principal Components Regression), MLR analysis technique (Multiple Linear Regression), artificial neural network analysis technique or similar analysis technique.

6. A method of determining the content of a constituent of blood of an individual, comprising:
extracting a whole blood stream of said individual from a blood vessel of said individual,
directing said whole blood stream through a flow path comprising a flow-through measuring cuvette constituting part of said flow path, said flow-through

measuring cuvette including at least one, optically transparent surface part,

propelling said whole blood stream through said flow path by means of a pump causing said whole blood stream to flow through said flow path in a pulsed mode,
5 monitoring said flow of said whole blood stream through said flow-through measuring cuvette of said flow path, so as to determine periods of substantially constant flow of said whole blood stream through said flow-through measuring cuvette,
10

irradiating said at least one optically transparent surface part of said flow-through measuring cuvette with electromagnetic radiation of a specific spectral composition, so as to expose said whole blood stream
15 flowing through said flow-through measuring cuvette to said electromagnetic radiation,

detecting the electromagnetic radiation absorption spectrum, represented by electromagnetic radiation absorption data, of said whole blood stream flowing
20 through said flow-through measuring cuvette at said periods of substantially constant flow of said whole blood stream flowing through said flow-through measuring cuvette, and

quantifying said content of said constituent by
25 inputting said electromagnetic radiation absorption data into a mathematical model representing the relation between electromagnetic radiation absorption data and the content of said constituent.

30 7. The method according to Claim 6, said flow-through measuring cuvette comprising opposite first and second optically transparent surface parts and defining a substantially non-varying optical transmission path, and said detection of said electromagnetic radiation absorption spectrum being determined by detecting the
35

transmission of said electromagnetic radiation through said whole blood stream flowing through said flow-through measuring cuvette through said optical transmission path thereof.

5

8. An apparatus for determining the content of a constituent of blood of an individual, comprising:

means for extracting a whole blood stream from a blood vessel of said individual,

10 a flow path defining a substantially non-varying flow-through area,

means for directing said whole blood stream through said flow path,

15 a flow-through measuring cuvette constituting a part of said flow path, said flow-through measuring cuvette including opposite first and second optically transparent surface parts defining an optical transmission path of the order of 0.5 - 2.0 mm,

20 means for generating and irradiating said first optically transparent surface part of said flow-through measuring cuvette with multi-wavelength near infrared light so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said multi-wavelength near infrared light,

25 detector means for detecting the near infrared absorption spectrum of said whole blood stream flowing through said flow-through measuring cuvette represented by near infrared absorption data, and

30 quantifying means for quantifying said content of said constituent by inputting said near infrared absorption data into a mathematical model representing the relation between near infrared absorption data and the content of said constituent.

9. The apparatus according to Claim 8, said non-varying flow-through area being of the order of 5-20 mm², preferably 12-17 mm².

5 10. The apparatus according to any of the Claims 8 or
9, said flow-through measuring cuvette comprising a
central section including said opposite first and sec-
ond optically transparent surface parts, tubular inlet
and outlet sections and first and second transition
10 sections, said first and second transition sections
constituting sections connecting said inlet and outlet
sections, respectively, to said central section and
presenting gradually changing sectional shapes generat-
ing to no substantial extent pressure or velocity gra-
15 dients to said whole blood stream flowing through said
flow-through cuvette so as to eliminate to any substan-
tial extent any blood degrading pressure or velocity
impact to said blood flow.

20 11. The apparatus according to any of the Claims 8-10,
said mathematical model being established on the basis
of a training set of samples having relevant known
variations in composition and thus producing relevant
absorption spectra.

25 12. The apparatus according to Claim 11, said quanti-
fying of said content of said constituent further com-
prising mathematical analysis technique such as multi-
variate data analysis technique, e.g. PLS analysis
30 technique (Partial Least Square), PCR analysis tech-
nique (Principal Components Regression), MLR analysis
technique (Multiple Linear Regression), artificial
neural network analysis technique or similar analysis
technique.

35

13. An apparatus for determining the content of a constituent of blood of an individual, comprising:

means for extracting a whole blood stream of said individual from a blood vessel of said individual,

5 a flow path,

means for directing said whole blood stream through said flow path,

a flow-through measuring cuvette constituting part of said flow path, said flow-through measuring cuvette including at least one optically transparent surface part,

means for directing said whole blood stream through said flow path,

means for propelling said whole blood stream through said flow path, causing said flow-path to flow through said flow path in a pulsed mode,

monitor means for monitoring said flow of said whole blood stream through said flow-through measuring cuvette of said flow path, so as to determine periods of substantially constant flow of said whole blood stream flowing through said flow-through measuring cuvette,

means for generating and irradiating said at least one optically transparent surface part of said flow-through measuring cuvette with electromagnetic radiation of a specific spectral composition, so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said electromagnetic radiation of said specific spectral composition,

30 detector means for detecting the electromagnetic radiation absorption spectrum, represented by electromagnetic radiation absorption data, of said whole blood stream flowing through said flow-through measuring cuvette at said periods of substantially constant flow of

said whole blood stream flowing through said flow-through measuring cuvette, and

quantifying means for quantifying said content of said constituent by inputting said electromagnetic
5 radiation absorption data into a mathematical model representing the relation between electromagnetic radiation absorption data and the content of said constituent.

10 14. The apparatus according to Claim 13, said mathematical model being established on the basis of a training set of samples having relevant known variations in composition and thus producing relevant absorption spectra.

15 15. The apparatus according to Claim 14, said quantifying of said content of said constituent further comprising mathematical analysis technique such as multivariate data analysis technique, e.g. PLS analysis
20 technique (Partial Least Square), PCR analysis technique (Principal Components Regression), MLR analysis technique (Multiple Linear Regression), artificial neural network analysis technique or similar analysis technique.

25 16. A flow-through measuring cuvette for use in determining the content of a constituent of blood of an individual by directing a whole blood stream through said flow-through measuring cuvette and by irradiating
30 said whole blood stream flowing through said flow-through measuring cuvette with multi-wavelength near infrared light for exposing said whole blood stream flowing through said flow-through measuring cuvette to multi-wavelength near infrared light, said flow-through
35 measuring cuvette defining a substantially non-varying

flow-through area and including opposite, optically transparent surface parts defining a substantially non-varying optical transmission path of the order of 0.5 - 2.0 mm.

5

17. The flow-through measuring cuvette according to Claim 16, said cuvette being a glass cuvette.

10 18. The flow-through measuring cuvette according to any of the Claims 16 or 17, said flow-through measuring cuvette comprising a central section including said opposite first and second optically transparent surface parts, tubular inlet and outlet sections and first and second transition sections, said first and second transition sections constituting sections connecting said
15 inlet and outlet sections, respectively, to said central section and presenting gradually changing sectional shapes generating to no substantial extent pressure or velocity gradients to said whole blood stream flowing through said flow-through cuvette so as to eliminate to any substantial extent any blood degrading pressure or velocity impact to said blood flow.

25 19. A method of hemodialysis, comprising:
extracting a whole blood stream of the order of 50-1,000 ml/min from a blood vessel of an individual, directing said whole blood stream through an extracorporeal flow path to a hemodialyser through a flow path comprising a flow-through measuring cuvette constituting part of said flow path, said flow-through
30 measuring cuvette including opposite first and second optically transparent surface parts defining an optical transmission path of the order of 0.5 - 2.0 mm,
irradiating said first optically transparent surface part of said flow-through measuring cuvette with
35

multi-wavelength near infrared light comprising light of the wavelength range 700 - 1,800 nm such as 1,400 - 1,600 nm so as to expose said whole blood stream flowing through said flow-through measuring cuvette to said multi-wavelength near infrared light,

5 detecting the near infrared absorption spectrum of said whole blood stream flowing through said flow-through measuring cuvette represented by near infrared absorption data,

10 quantifying the content of urea of said whole blood stream by inputting said near infrared absorption data into a mathematical model representing the relation between near infrared absorption data and the content of urea.

15 20. The method according to Claim 19, said flow path defining a substantially non-varying flow-through area.

21. The method according to any of the claims 19 or 20, further comprising continuing said hemodialysis treatment until the content of urea of said whole blood stream has decreased below a specific threshold.

22. The method according to Claim 20, said non-varying flow-through area being of the order of 5-20 mm², preferably 12-17 mm².

23. The method according to any of the Claims 21 or 22, said flow-through measuring cuvette comprising a central section including said opposite first and second optically transparent surface parts, tubular inlet and outlet sections and first and second transition sections, said first and second transition sections constituting sections connecting said inlet and outlet sections, respectively, to said central section and

30

35

presenting gradually changing sectional shapes generating to no substantial extent pressure or velocity gradients to said whole blood stream flowing through said flow-through cuvette so as to eliminate to any substantial extent any blood degrading pressure or velocity impact to said blood flow.

24. The method according to any of the Claims 21-23, said mathematical model being established on the basis of a training set of samples having relevant known variations in composition and thus producing relevant absorption spectra.

25. The method according to Claim 24, said quantifying of said content of said constituent further comprising mathematical analysis technique such as multivariate data analysis technique, e.g. PLS analysis technique (Partial Least Square), PCR analysis technique (Principal Components Regression), MLR analysis technique (Multiple Linear Regression), artificial neural network analysis technique or similar analysis technique.

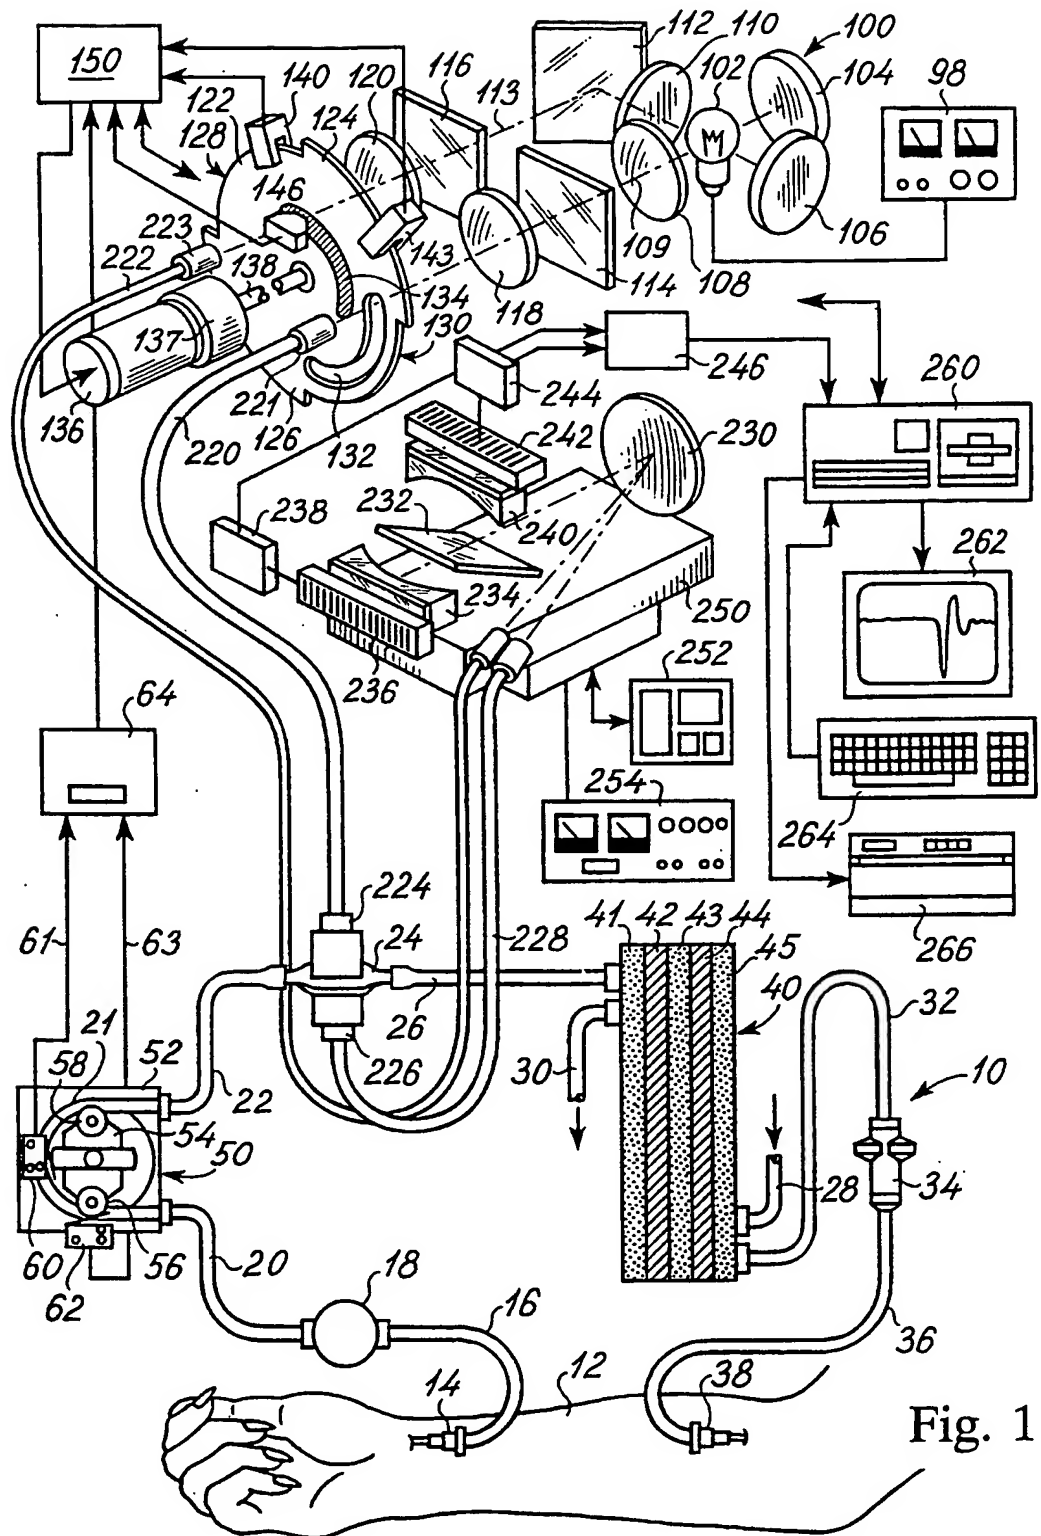


Fig. 1

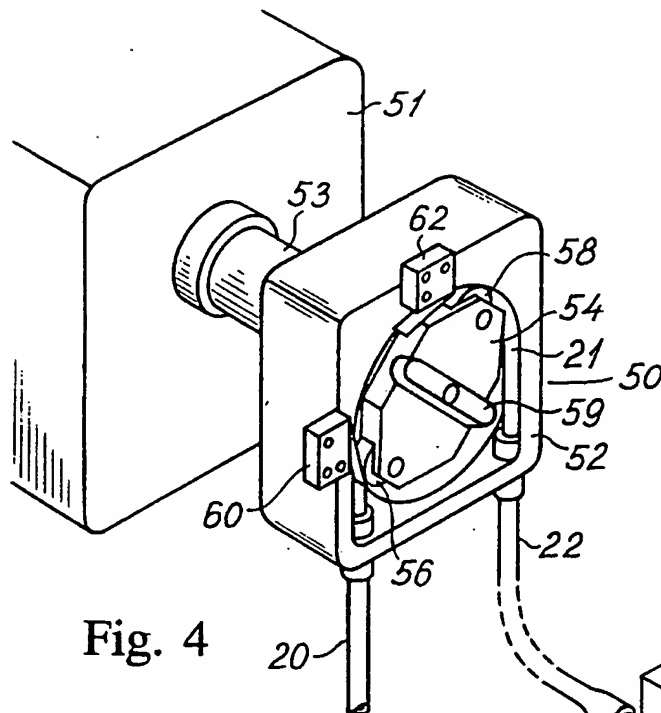


Fig. 4

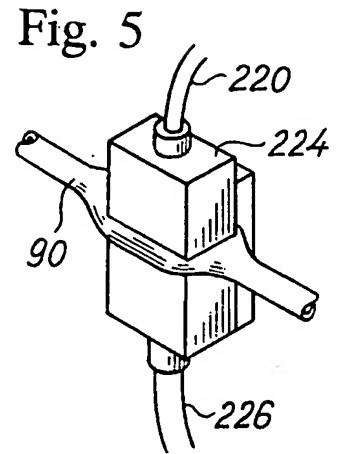


Fig. 5

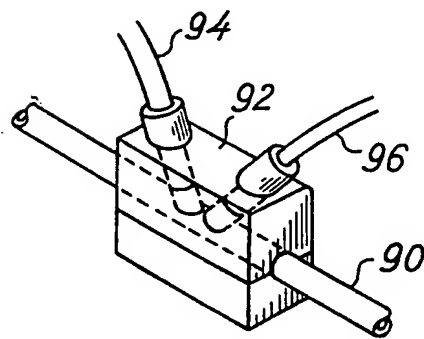


Fig. 6

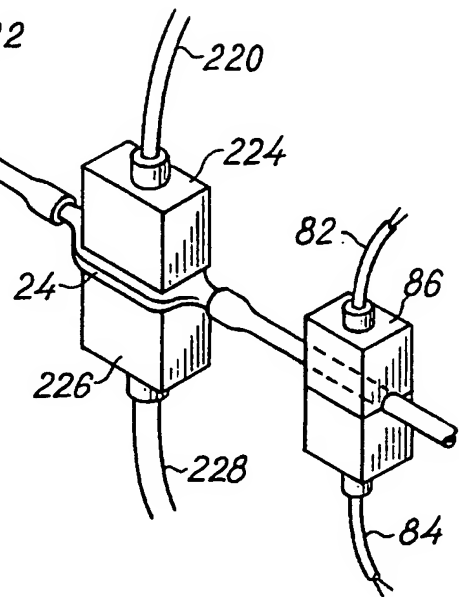
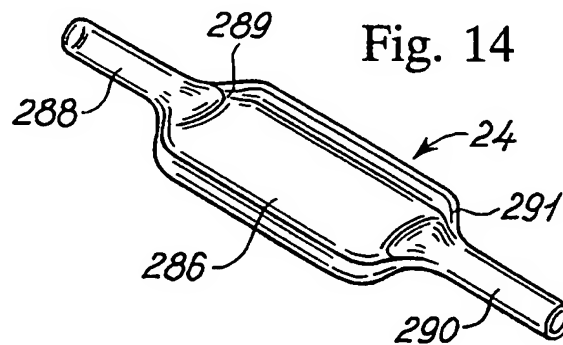


Fig. 14



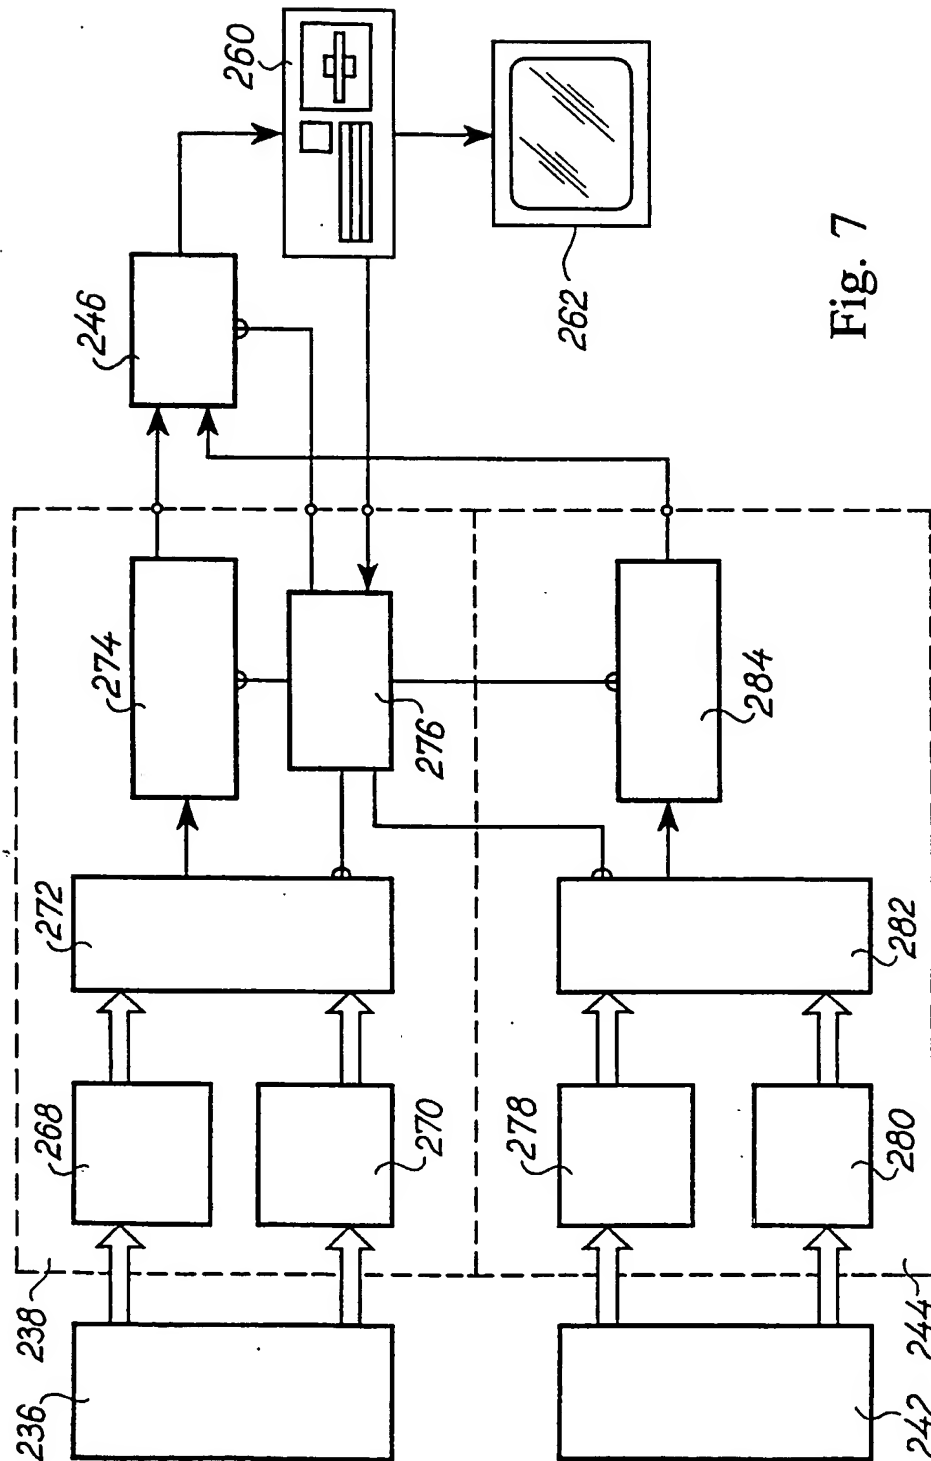


Fig. 7

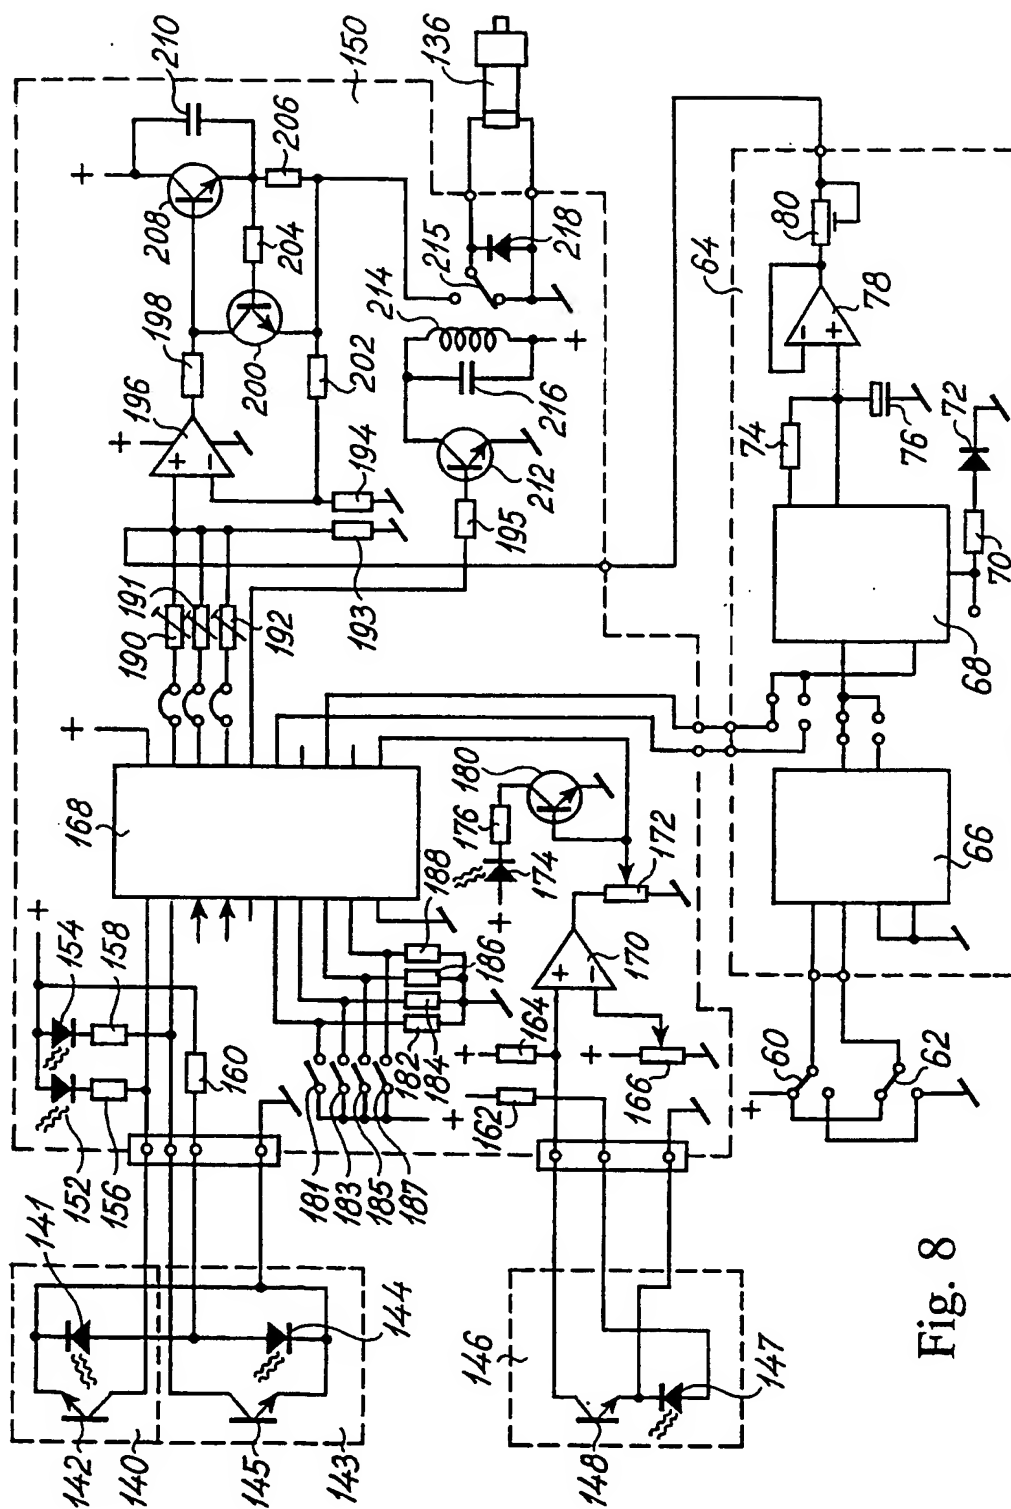


Fig. 8

6/11

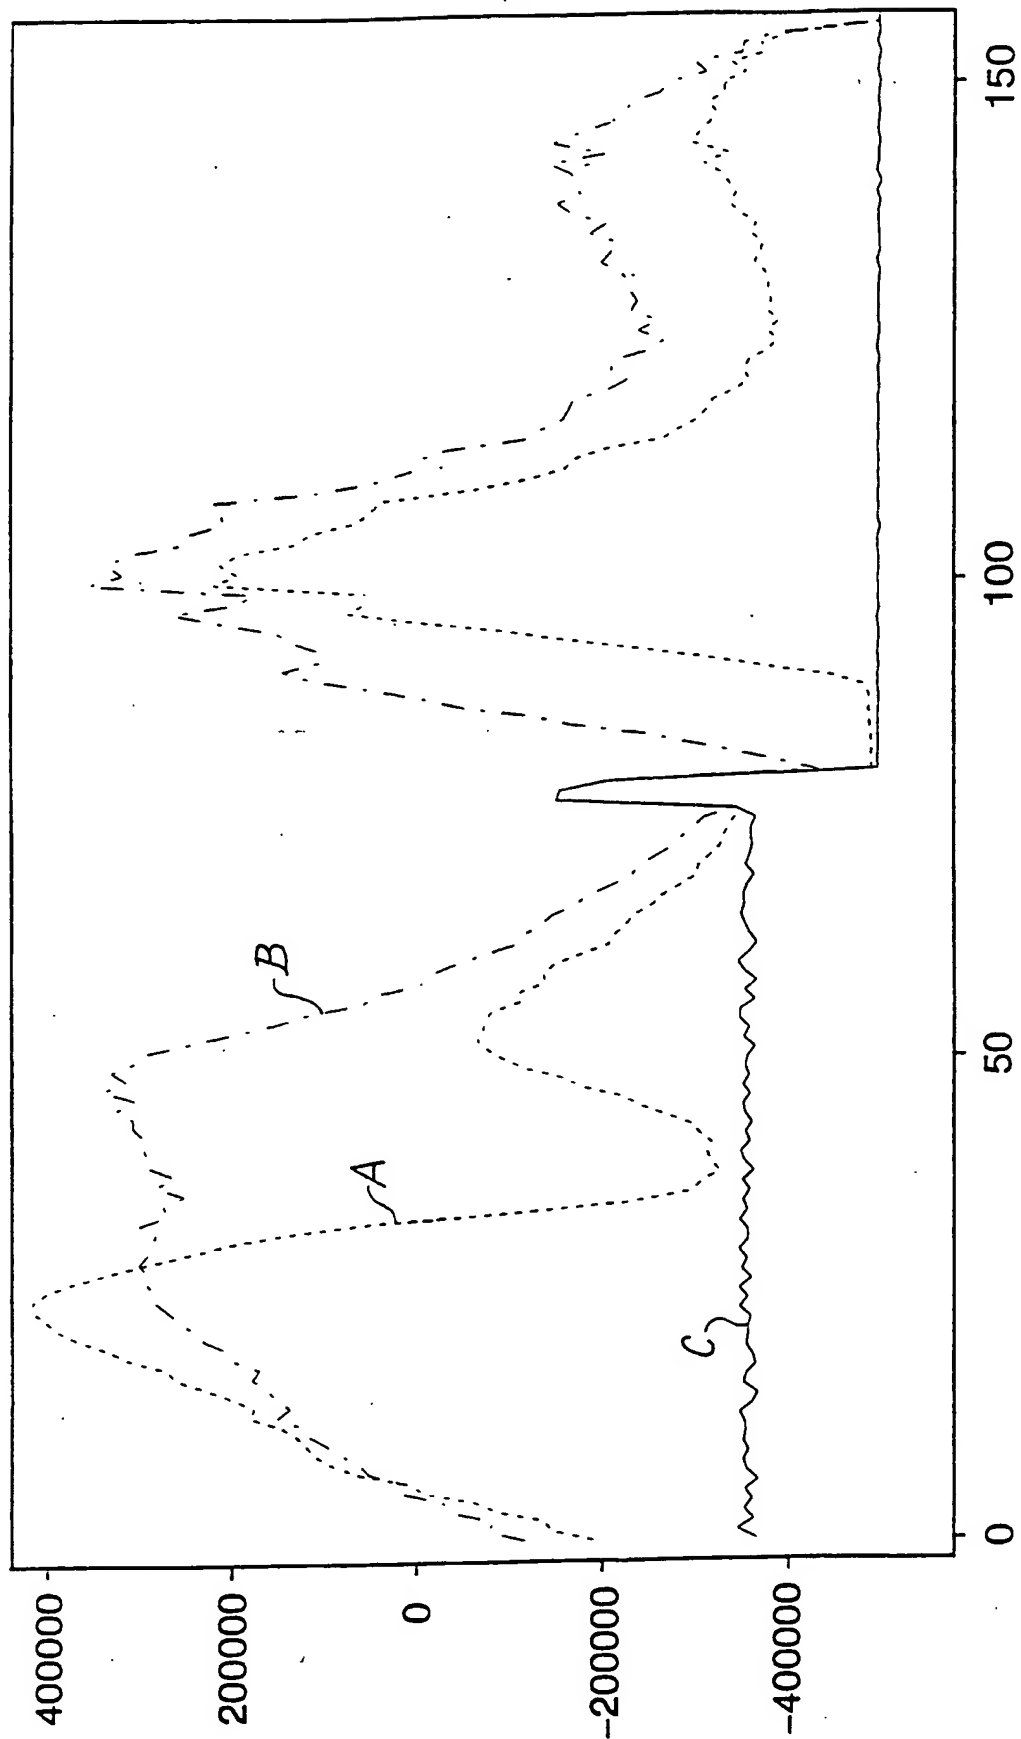


Fig. 9

7/11

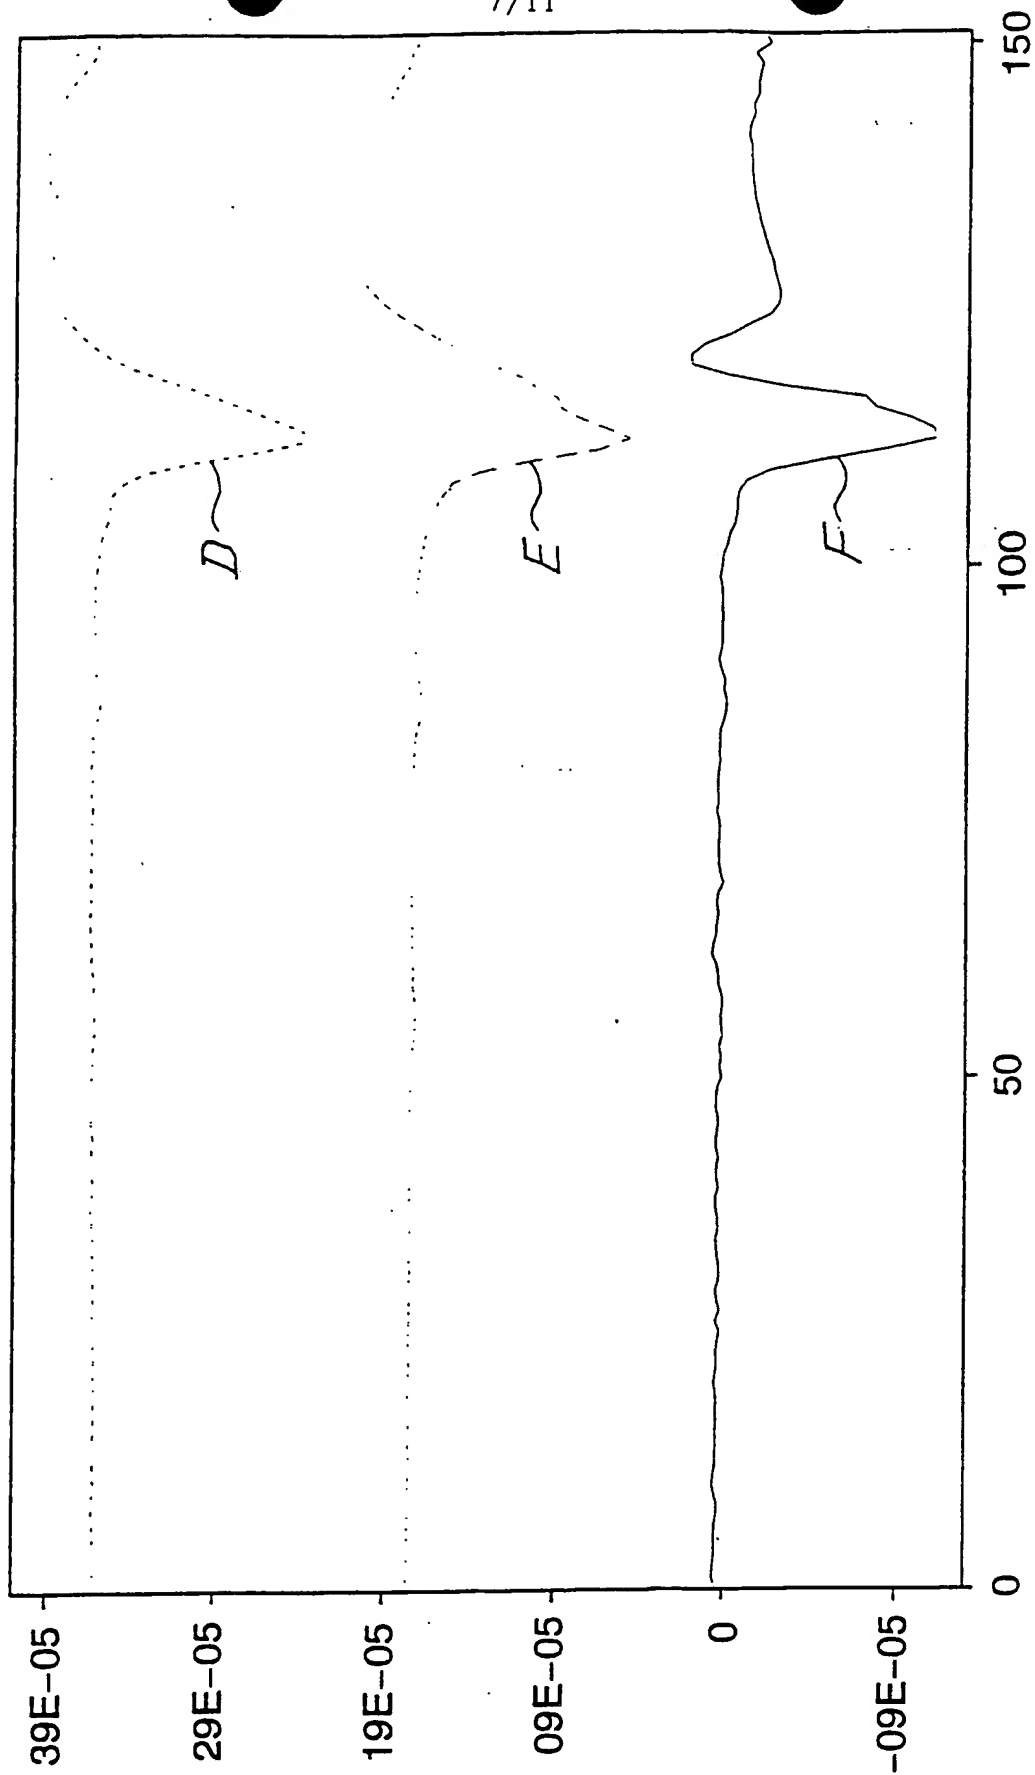


Fig. 10

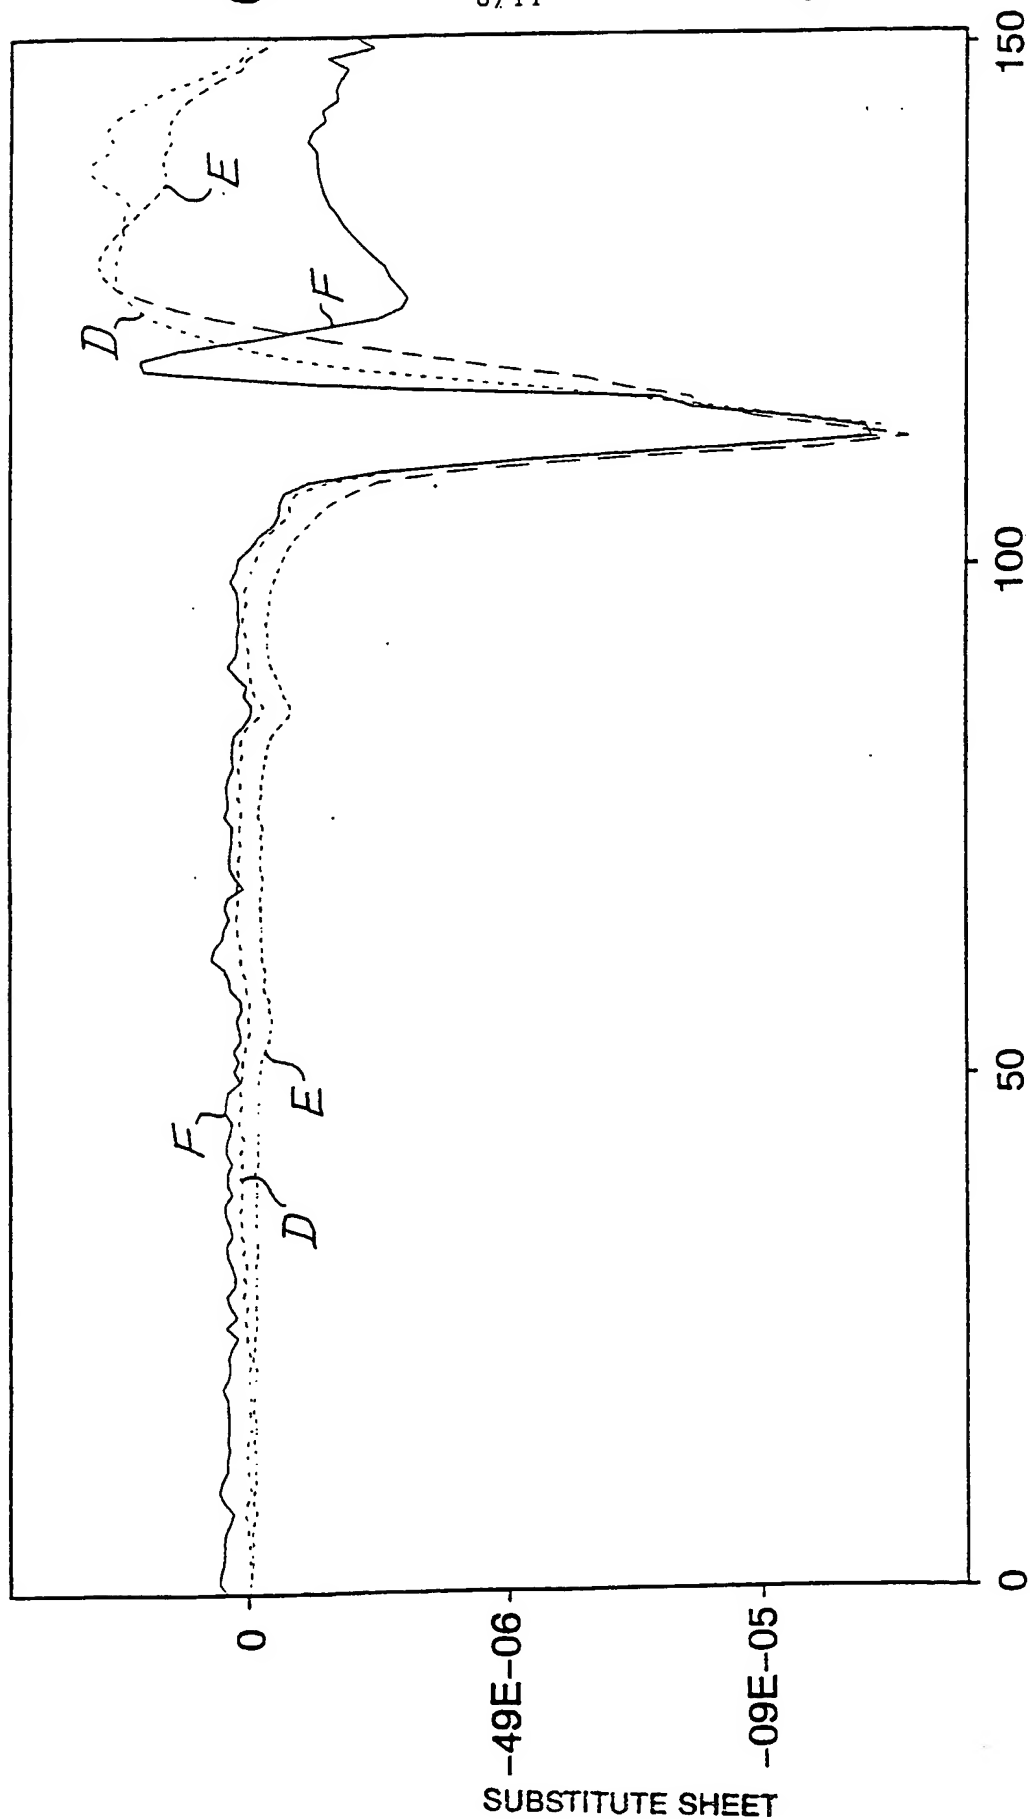


Fig. 11

9/11

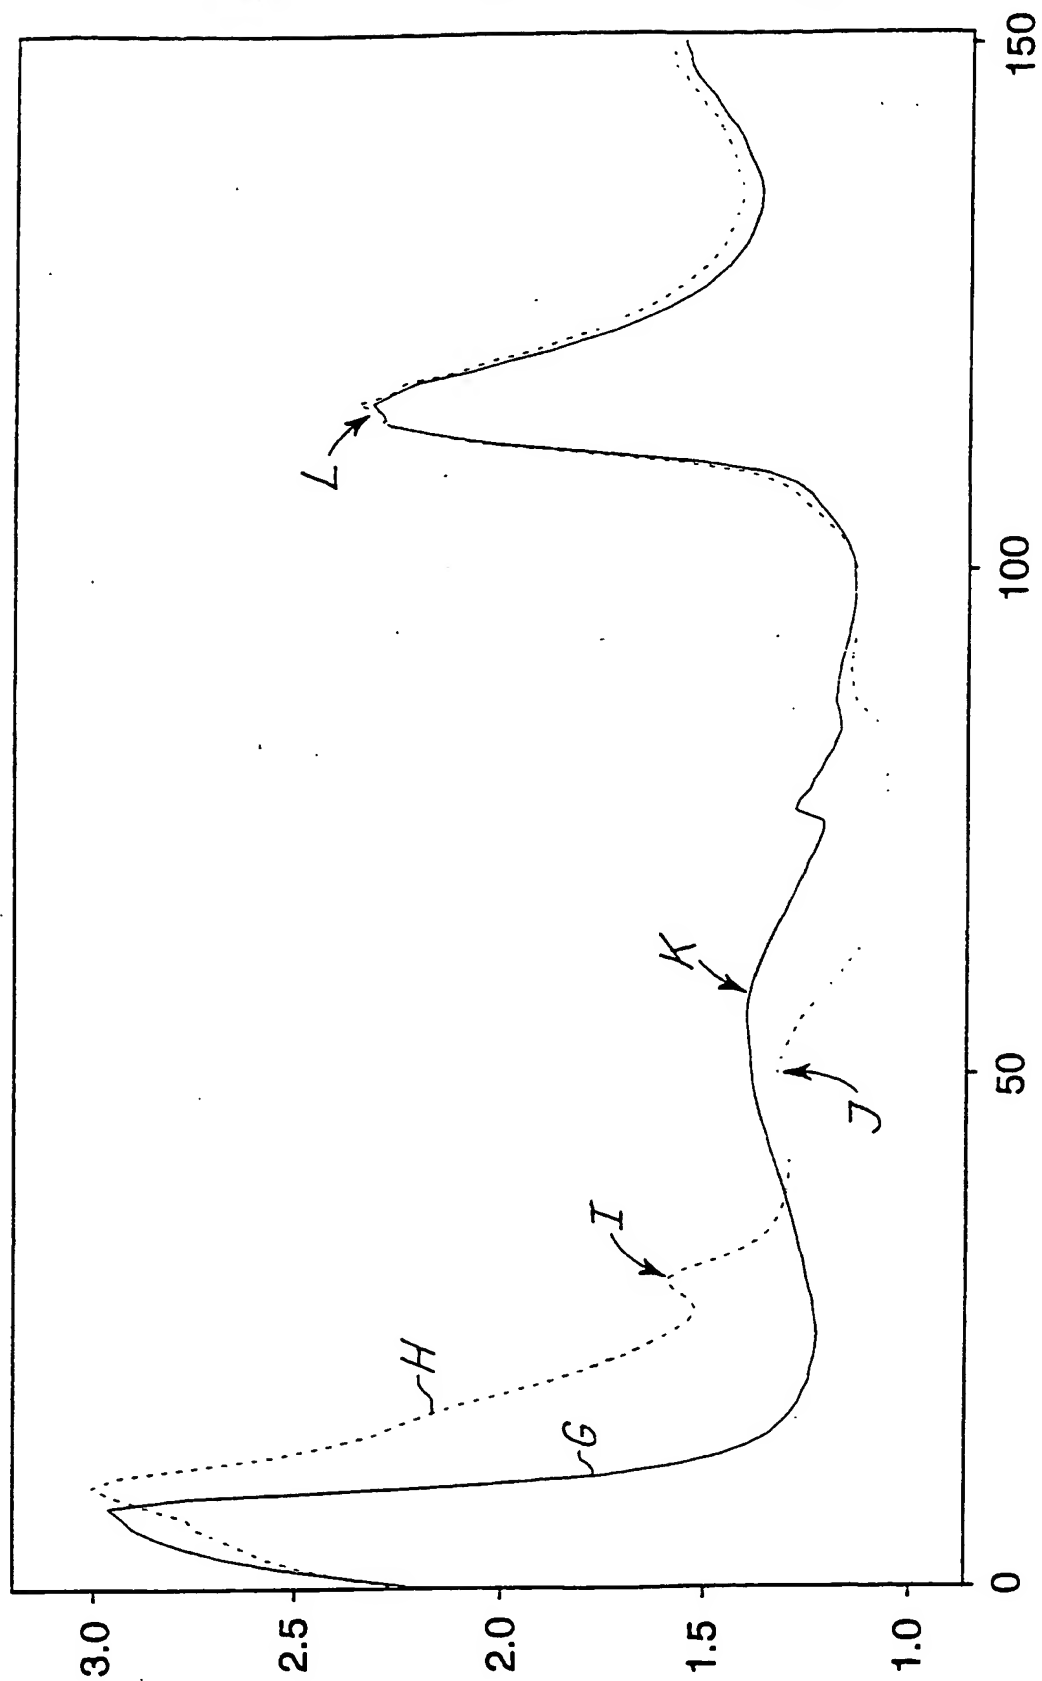


Fig. 12

SUBSTITUTE SHEET

10/11


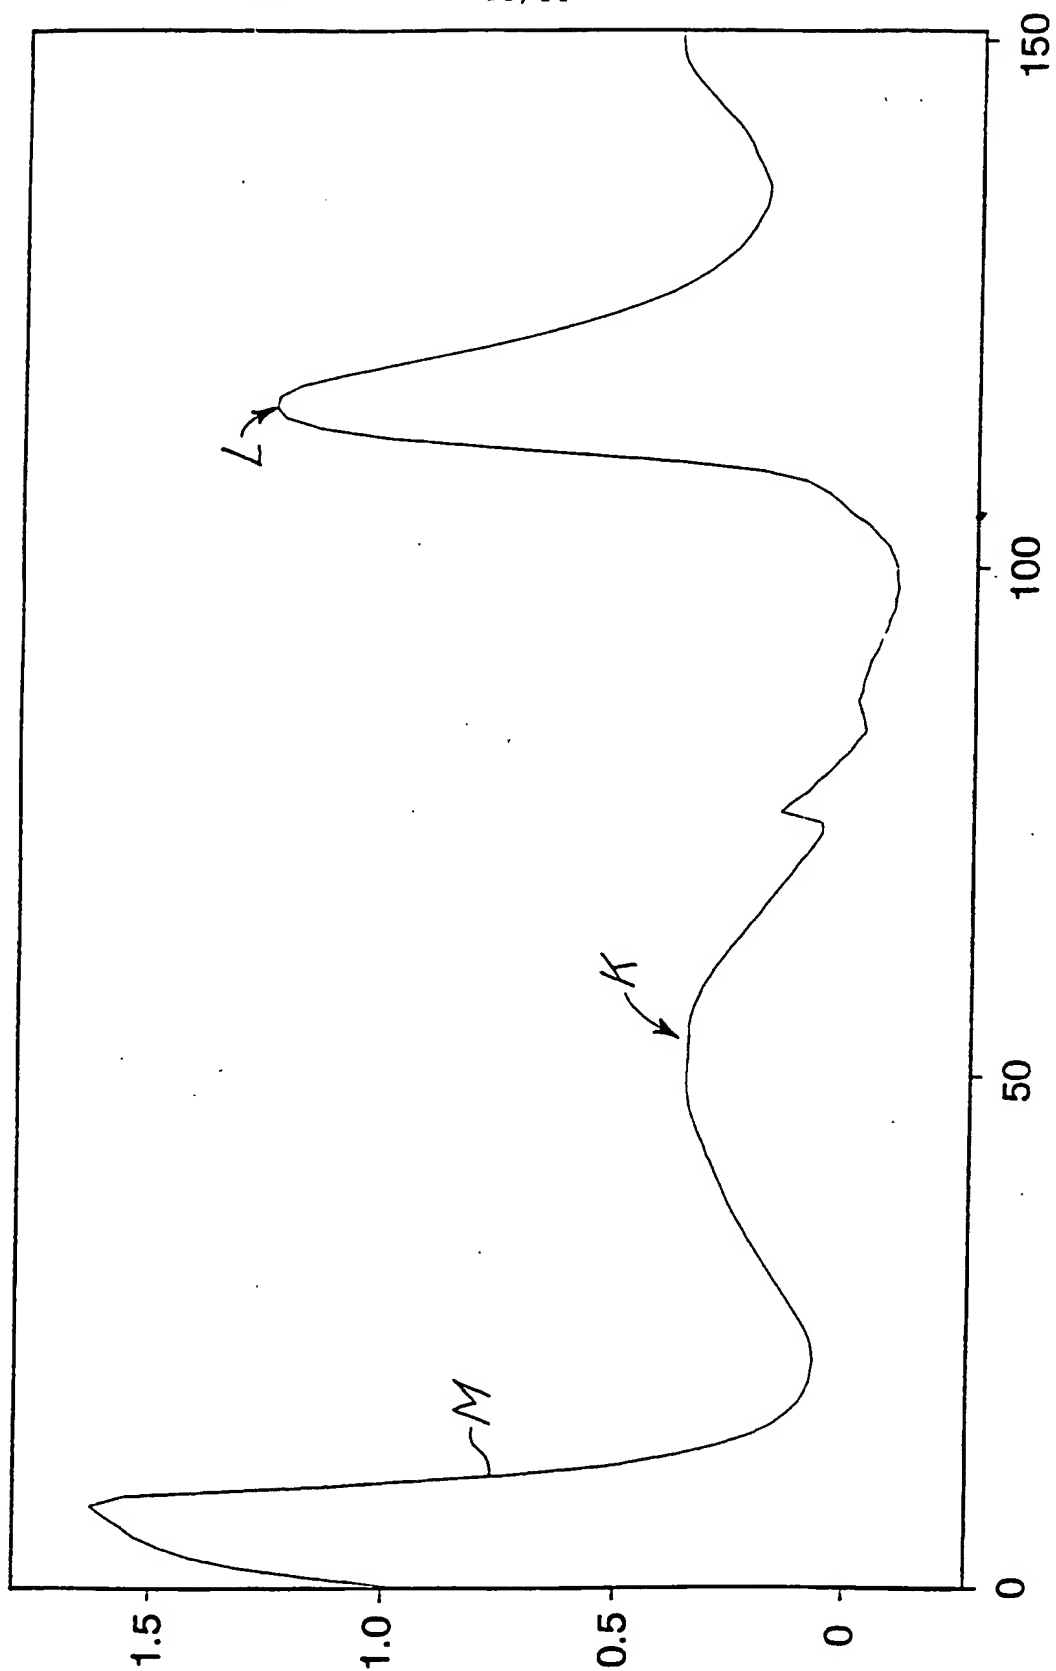


Fig. 13

Fig. 15

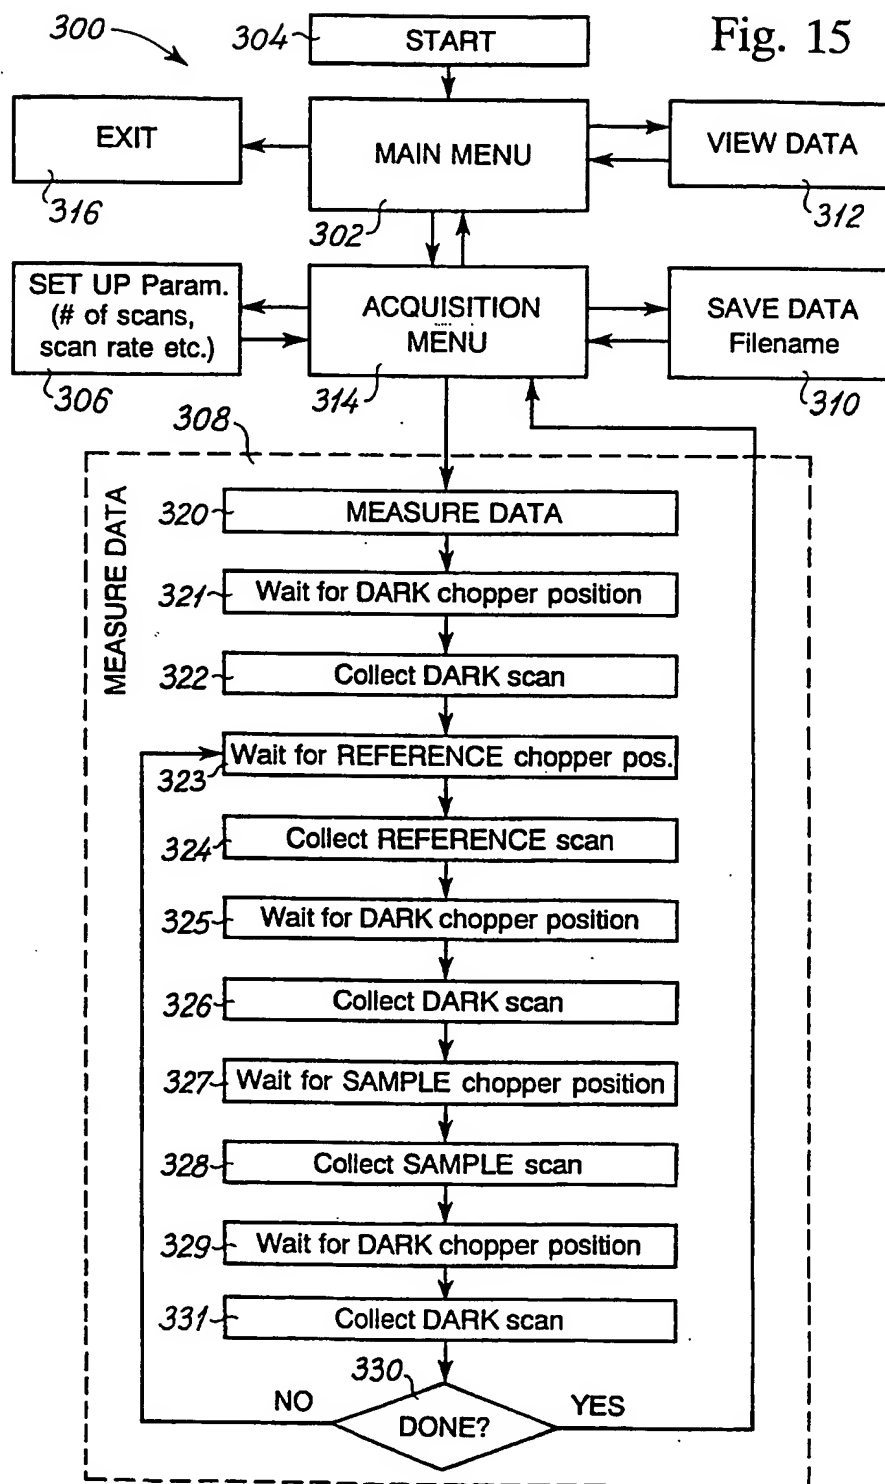

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 94/00297

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G01N 21/35, G01N 21/05

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, CLAIMS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP, A2, 0419223 (MINNESOTA MINING AND MANUFACTURING COMPANY ET AL.), 27 March 1991 (27.03.91), page 4, line 51 - page 6, line 31; page 11, line 45 - page 12, line 58; page 14, line 8 - line 40, figure 14	1,6,8,13,14, 15,19
Y	page 4, line 51 - page 6, line 31; page 11, line 45 - page 12, line 58, page 14, line 8 - line 40, figure 14	2-5,7,9-12, 16-18,20-25
	--	
Y	US, A, 4745279 (M.N. KARKAR ET AL.), 17 May 1988 (17.05.88), column 2, line 63 - column 3, line 27, figures 1a,3,7, abstract	2-5,7,9-12, 16-18,20-25
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

4 November 1994

09 -11- 1994

Name and mailing address of the ISA/

Authorized officer

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Karin Säfsten

Facsimile No. +46 8 666 02 86

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/K 94/00297

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4975581 (M.R. ROBINSON ET AL.), 4 December 1990 (04.12.90), figure 1, abstract --	1-25
A	EP, A2, 0476192 (THE BOARD OF REGENTS OF THE UNIVERSITY OF WASHINGTON), 25 March 1992 (25.03.92), abstract --	1-15, 19-25
A	EP, A2, 0419222 (MINNESOTA MINING AND MANUFACTURING COMPANY ET AL.), 27 March 1991 (27.03.91), abstract -- -----	1-15, 19-25

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/10/94

International application No.

PCT/K 94/00297

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0419223	27/03/91	CA-A- 2025330 JP-A- 3118446	19/03/91 21/05/91
US-A- 4745279	17/05/88	CA-A- 1279499 EP-A- 0231652 JP-A- 62265563	29/01/91 12/08/87 18/11/87
US-A- 4975581	04/12/90	AU-B- 638649 AU-A- 5771490 CA-A- 2019511 EP-A- 0404562 JP-A- 3114441	01/07/93 03/01/91 21/12/90 27/12/90 15/05/91
EP-A2- 0476192	25/03/92	NONE	
EP-A2- 0419222	27/03/91	JP-A- 3113351	14/05/91